



Dormont®

R01-11

REVISION 1


Stainless Steel
Gas Appliance
Connectors
& Accessories

EZ Quick

Tankless
Water Heater
Connection Kits

Foodservice
Gas Connectors

PowerForce

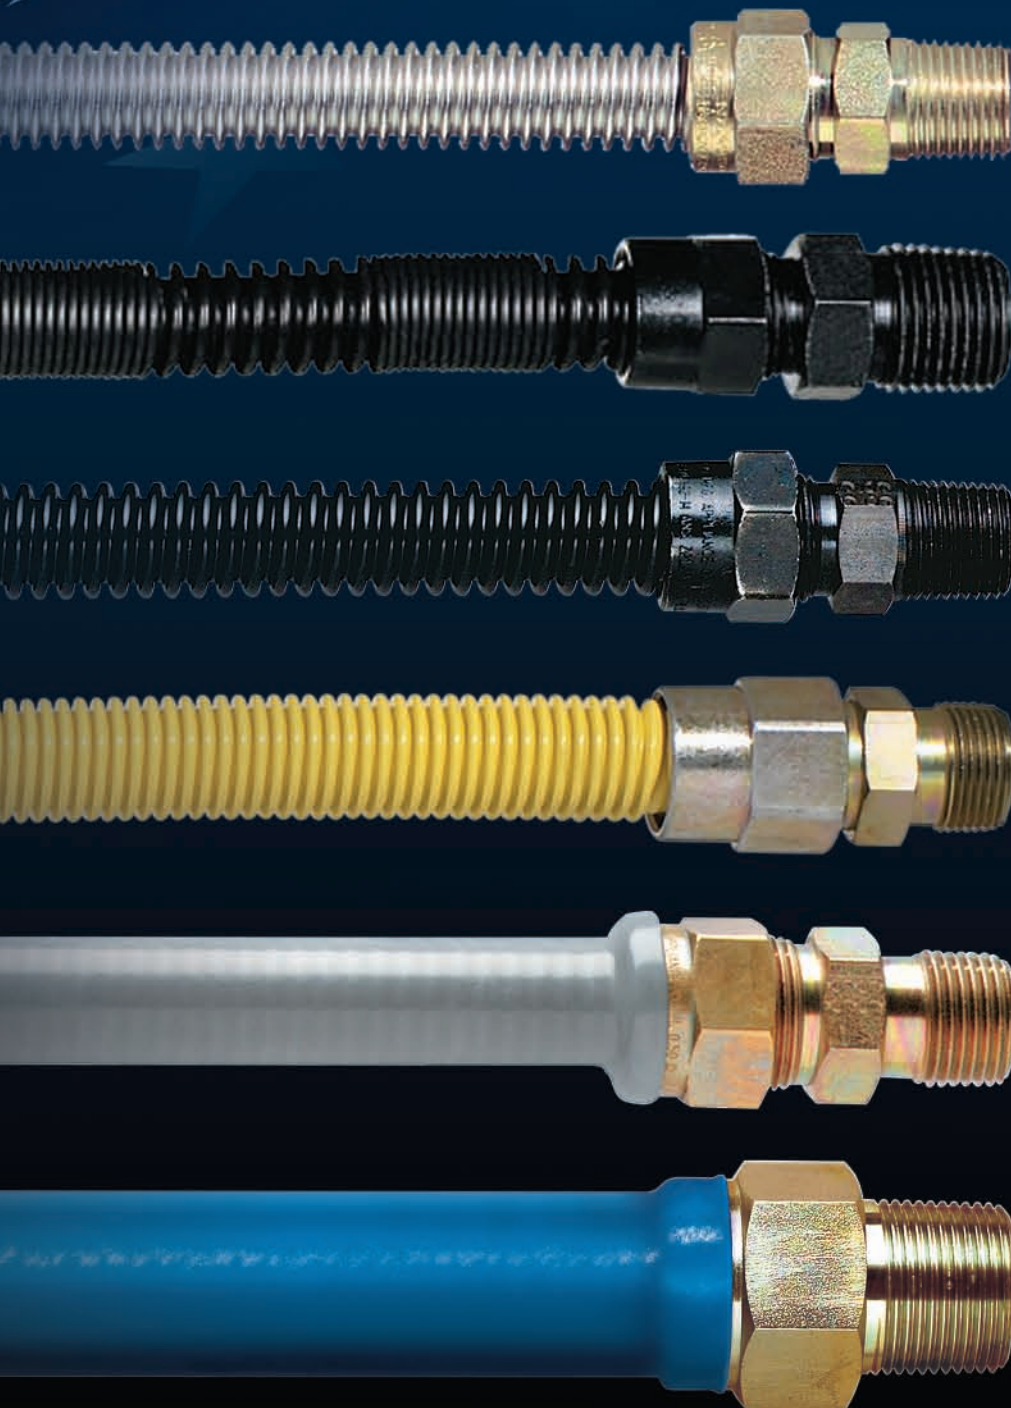

A COMPLETE Line of Gas Connectors for All Types of Gas Appliances



Supr-Safe



Stainless Steel Gas Connectors

Durable, naturally corrosion-resistant 304 stainless steel gas connectors for indoor or outdoor stationary appliance applications.



SAFETY SHIELD



Coated Stainless Steel Gas Connectors

Safety Shield® coating provides easy gas line identification and extra protection from chemical corrosion from accidental contact with household chemicals. Consistent coverage provides protection along the entire length of the connector.



LV
LOW-VISIBILITY
COATING
TECHNOLOGY



Stainless Steel Gas Hearth Connectors with High-Temperature Black Coating

Specifically engineered for high-temperature applications such as gas logs, fireplace inserts and free-standing fireplaces. Features a low-visibility coating that hides the connector from view.



Whisperflex



Stainless Steel Gas Hearth Connectors With High-Temperature Black Coating for High BTU Applications

Engineered for high-temperature, high BTU applications such as gas logs, fireplace inserts and free-standing fireplaces. The special corrugation design eliminates the annoying whistle produced by some high BTU gas applications.



ULTRA flow



High BTU Stainless Steel Gas Connectors

Available with hot-dipped, heavy-duty gray PVC coating, Safety Shield yellow coating or stainless steel for indoor and outdoor high BTU applications. Gas Connector Kits are available for mobile home installations.



15 PSIG Stainless Steel Gas Connectors

Designed for outdoor, above-ground use, this gas connector is a safe and easy alternative to typical copper polyethylene connectors for the connection of propane tanks. This connector is rated to 15 PSIG—all other connectors are approved under ANSI Z21.24 to 1/2 PSIG.



Adapters, Valves and Regulators

CSA listed adapters, valves and regulators complete a code compliant installation.

Commercial Foodservice Gas Connector and SnapFast Quick-Disconnect

Specifically engineered for commercial cooking equipment, the Dormont Safety System™ Blue Hose™ features antimicrobial PVC coating and patented Stress Guard™ technology. The SnapFast QD and restraining cable complete the gas connection and extend the service life of the gas connector.



Dormont's Guiding Principles

Safety

As the inventor and leading manufacturer of safe, high quality stainless steel gas connectors, Dormont has earned the reputation as the expert in the gas connection business. We have a proven performance record that spans over 60 years – with more than 100 million safe installations worldwide. Industry professionals ask for Dormont by name. Our dedication, reputation and history are why Dormont is known for "Setting the Standard in Gas Safety™."

Customer Focus

The success of our company is based on listening to our customers, understanding their needs and developing products and services that meet or exceed their requirements. We work in a collaborative manner with our customers and supply chain partners to develop innovative, effective solutions.

Value Creation

Providing high quality products, great service and competitive pricing is a requirement in today's challenging business world. Beyond the basics, companies that provide superior service, creative ideas and innovative new products that exceed customer expectations will earn the right to be a trusted "Supply Chain Partner." We are focused on performing the fundamentals flawlessly - and then providing engineering and technical support, marketing and merchandising expertise and performance improvement ideas for our customers.

Continuous Improvement

Our ability to meet our customers' needs in the future is predicated on our ability to continuously improve the capabilities, knowledge and performance of our company. Our commitment to continuous improvement is affirmed through ongoing projects that utilize Six Sigma and Lean Concepts to upgrade our business processes throughout the supply chain to work smarter and more effectively.

Quality

Quality is the number one priority at Dormont. As an ISO 9001:2008 registered manufacturer, we utilize a Quality Business System to drive our commitment to continuous improvement. Dormont's safe, high quality products are design certified by the leading testing agencies based on a wide range of global standards. Beyond our prestigious certifications, our quality is driven by one idea: Make every product as if it were going to be installed in your own home or business.

People

We believe in hiring, developing and retaining superior staff, treating them with respect and creating a positive, challenging, supportive, rewarding and safe work environment. We believe in empowerment of our employees with shared goals and direction.

Integrity

Integrity guides all of our actions. We've built our company by acting with integrity, honesty and fairness in our relationships with all of our employees, customers, suppliers and constituents. We do what we say we will do, and we remain trustworthy in all matters.

Leadership

Dormont is an industry leader in product innovation, industry participation and pioneering creative marketing programs. As the inventor of both the stainless steel and quick disconnect gas connectors, Dormont has helped revolutionize the gas connector category. We have played a lead role in the ongoing development of industry standards throughout the world, always with an emphasis on safety. Dormont has also introduced many innovative products, services and programs that have helped create value for our customers.

Passion

"People don't care how much you know - until they know how much you care!" These powerful words epitomize our business. "Passionate care" for our customers is a core value that is the Dormont culture. Everyone at Dormont cares deeply about our customers - and we strive to ensure that this passion is evident through all of our actions.

Dormont

1-800-DORMONT
www.dormont.com



Part Numbering System

Gas Connectors

EXAMPLE:
Characters:

3	0	C	31	32	48
1	2		3	4	5
Description:	5/8" OD (1/2" ID)	Corrugated Tubing Safety Shield yellow coated	1/2" MIP (Tapped 3/8" FIP)	1/2" FIP	48" in length

Character 1: Diameter of connector (choose one)

Part #

1	3/8" OD (1/4" ID)
2	1/2" OD (3/8" ID)
3	5/8" OD (1/2" ID)
4	1" OD (3/4" ID)
5	1-1/4" OD (1" ID)
6	1-1/2" OD (1-1/4" ID)

Character 2: Coating

Part #

O	Corrugated Tubing
OA	Low-visibility Black
OC	Safety Shield Yellow Coating
1	Hot-Dipped Gray PVC Coating
1P	15 PSIG Connector with Hot-Dipped, Gray PVC Coating

Characters 3 & 4: Choice of fitting or valve for both ends of connector (choose two)

Part #

21	3/8" MIP (Tapped 1/4" FIP)
22	3/8" FIP
23	3/8" MIP Elbow
24	3/8" FIP Elbow
31	1/2" MIP (Tapped 3/8" FIP)
32	1/2" FIP
33	1/2" MIP Elbow
34	1/2" FIP Elbow
35	1/2" FIP Straight Connector Valve
36	1/2" FIP Angle Connector Valve
41	3/4" MIP (Tapped 1/2" FIP)
42	3/4" FIP
43	3/4" MIP Elbow
44	3/4" FIP Elbow
45	3/4" FIP Straight Connector Valve
46	3/4" FIP Angle Connector Valve
51	1" MIP (Tapped 3/4" FIP)
52	1" FIP
61	1-1/4" MIP (Tapped 1" FIP)
62	1-1/4" FIP
98	Nut Only

Character 5: Nominal length in inches. (choose one)

12	18	24	30	36	48	60	72
----	----	----	----	----	----	----	----

Fittings and Gas Shut-off Valves

EXAMPLE:
Characters:

90	30	31
1	2	3
Description:	Fitting	5/8" OD Flare (15/16" - 16 thread) 1/2" MIP (tapped 3/8" FIP)

Character 1: Style of accessory (fitting or valve)

Part #

90	Fitting
91	Connector Valve
92	Straight Valve
93	Angle Connector Valve
94	Full Port Valve
95	Elbow

Characters 2 & 3: Choice of fitting or valve for both ends of connector (choose two)

Part #

10	3/8" OD Flare
20	1/2" OD Flare
21	3/8" MIP (Tapped 1/4" FIP)
22	3/8" FIP
30	5/8" OD Flare (15/16"-16 Thread)
31	1/2" MIP (Tapped 3/8" FIP)
32	1/2" FIP
40	1" OD Flare
41	3/4" MIP (Tapped 1/2" FIP)
42	3/4" FIP
50	1-1/4" OD Flare
51	1" MIP (Tapped 3/4" FIP)
52	1" FIP
60	1-1/2" OD Flare
61	1-1/4" MIP (Tapped 1" FIP)
62	1-1/4" FIP
72	1-1/2" FIP
82	2" FIP

Note: For poly-bagged connectors, consult Dormont for pricing.

Description	Page	Price Category	Multiplier
Range/Furnace Connectors – 30/31 Series	5	A	
Dryer/Water Heater Connectors – 20/21 Series	6	I	
Gas Logs and Space Heater Connectors – 10 Series	7	J	
Safety Shield® Yellow Coated Connectors – 30C/20C/10C Series	8-10	K	
Low-Visibility® Stainless Steel Gas Hearth Connectors – 10A/20A Series	11-12	L	
Whisperflex™ Connectors – 10ANW/20ANW Series	13	M	
High BTU Gas Connectors – 40, 40C, 41 / 50, 50C, 51 / 60, 60C, 61 Series	14-15	B	
Bagged Connector Kits and Accessories	16	N	
15 PSIG Propane (LP) Stainless Steel Gas Connectors – 31P Series	17	O	
Manufactured Home Gas Connector Kits	18	P	
Gas Flare Fittings and Caps	19-20	C	
Gas Shut-Off Valves	21	D	
Gas Regulators	22-23	E	
EZ Quick™ Kits and Valves	24	F	
Tankless Water Heater Connection Kits	25-26	Q	
Foodservice Connectors and Accessories	27	G	
PowerForce™ Pre-Rinses, Faucets, and Drains	28	H	
Terms and Conditions	29		
Warranty	30		
Certifications	31		
Distributor Merchandising and Retail Packaging	Inside Back Cover		


Prices effective 1-3-2011

Stainless Steel Gas Connectors Features, Benefits and Applications

Durable, corrosion-resistant stainless steel tubing

Markings stamped on the nut
not on an ID ring. This eliminates any vibration noise.

Exclusive No-Neck® design
increases tubing flexibility.

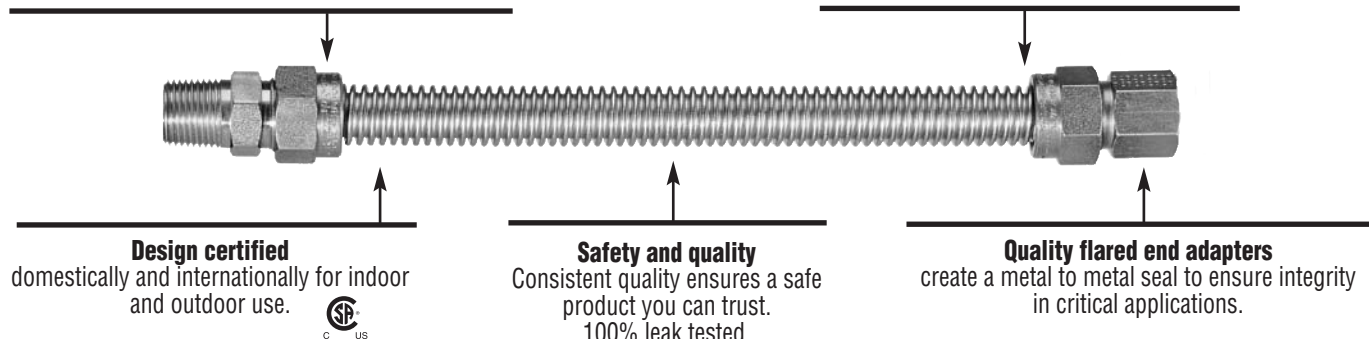

Design certified
domestically and internationally for indoor
and outdoor use.



Safety and quality
Consistent quality ensures a safe
product you can trust.
100% leak tested.

Quality flared end adapters
create a metal to metal seal to ensure integrity
in critical applications.

Features

- 304 stainless steel Durable, corrosion-resistant construction
- No Neck® design. Increases flexibility
- Markings stamped on nut not an ID ring. Eliminates any noise from vibration
- Full solution annealing at 2000° F Provides tremendous strength and flexibility and reduces the risk of stress corrosion cracking
- Quality flared end adapters Creates a metal to metal seal to ensure integrity in critical applications.
- CSA Design Certified domestically and Safety and Quality
internationally for indoor and outdoor use with
natural, manufactured, mixed, liquefied
petroleum (LP) and LP-gas air mixtures.

Benefits



Ordinary connector neck



Dormont No-Neck® Construction

Dormont's No-Neck® Design

With ordinary connectors, the tubing's straight neck enters the nut, and after being subjected to flexing, they may develop cracks that can result in a gas leak.

The Dormont No-Neck design reduces this danger because the first few tubing corrugations are enclosed within the nut. This results in increased tubing flexibility.

Indoor

CSA Design Certified under ANSI Z21.24/CSA 6.10, Dormont connectors are durable, flexible and easy to install, even in tight places. Designed with the safety of your home in mind, these connectors can be used for installation of all of the gas appliances throughout your home.

- Range
- Dryer
- Water Heater
- Gas Logs
- Furnace
- Wall Heater
- Gas Fireplaces
- Space Heater

Outdoor

CSA Design Certified under ANSI Z21.75/CSA 6.27 for gas connectors for the connection of fixed appliances for outdoor installation to the gas supply.

- Rooftop Units
- Outdoor Dryer
- Stationary Outdoor Grills
- Gas Fire Pits

Manufactured Home

CSA Design Certified under ANSI Z21.75/CSA 6.27 for gas connectors for the connection of park trailers and manufactured (mobile) homes to the gas supply. Large BTU capacity assures proper gas flow. Optional hot-dipped gray PVC coating provides added protection against weather and atmospheric conditions.

- Mobile Home Gas Meter
- Cross-over Gas Connection Kits

High BTU

CSA Design Certified under ANSI Z21.24/CSA 6.10, Dormont High BTU connectors ensure that gas appliances operate at their peak performance at all times. Refer to the BTU chart provided on page 14 for specifics.

- Commercial Water Heaters
- High-capacity Furnaces
- Boilers
- Tankless Water Heaters
- Up to 1.5 Million BTUs
- 1" OD, 1-1/4" OD and 1-1/2" OD

Stainless Steel Gas Connectors Specification Sheet



Applications

Indoor

- Range
- Dryer
- Water Heater
- Gas Fireplace
- Garage Heater
- Wall Heater
- Tankless Water Heater
- Furnace
- Space Heaters

Outdoor

- Rooftop Units
- Outdoor Dryer
- Stationary Outdoor Grills
- Gas Fire Pits

Manufactured Home




- Mobile Home Gas Meter
- Cross-over Gas Connection Kits



Connector Minimum Flow Capacity – For Natural Gas (per ANSI Z21.24/CSA 6.10 & ANSI Z21.75/CSA 6.27)										
Straight Length Capacity – BTU per Hr 0.64 SG., 1000 BTU per Cu. Ft. at 0.5 inch Water Column (124 Pa) Pressure Drop										
Series	Nominal OD (in)	Nominal ID (in)	12"	18"	24"	30"	36"	48"	60"	72"
10	3/8"	1/4"	48,000	43,800	40,000	36,400	33,400	28,300	24,900	23,100
20	1/2"	3/8"	102,000	93,100	85,000	77,100	71,100	60,500	53,200	49,100
30	5/8"	1/2"	180,000	164,200	150,000	136,000	125,000	106,000	93,200	86,000

Connector Minimum Flow Capacity – For Propane Gas (per ANSI Z21.24/CSA 6.10 & ANSI Z21.75/CSA 6.27)										
Straight Length Capacity – BTU per Hr 1.55 SG., 2500 BTU per Cu. Ft. at 0.5 inch Water Column (124 Pa) Pressure Drop										
Series	Nominal OD (in)	Nominal ID (in)	12"	18"	24"	30"	36"	48"	60"	72"
10	3/8"	1/4"	76,800	70,080	64,000	58,240	53,440	45,280	39,840	36,960
20	1/2"	3/8"	163,200	148,960	136,000	123,360	113,760	96,800	85,120	78,560
30	5/8"	1/2"	288,000	262,720	240,000	217,600	200,000	169,600	149,120	137,600

Note: When using 0.2 water column pressure drop, capacity can be determined by multiplying the values above by 0.632 (for both natural and propane gas). For capacities at other than noted, contact Dormont at 1-800-DORMONT.



Design Certifications and Approvals

- ANSI Z21.24/CSA 6.10 – Connectors for Gas Appliances
- ANSI Z21.75/CSA 6.27 – Connectors for Outdoor Appliances and Manufactured Homes
- City of New York – MEA #376-92-M
- Approved by the Commonwealth of Massachusetts Board of State Examiners of Plumbers and Gas Fitters – *connector length may not exceed 36"*.

ALL INSTALLATIONS MUST COMPLETELY COMPLY WITH ALL DORMONT MANUFACTURING COMPANY WARNINGS AND INSTRUCTIONS, NATIONAL, STATE AND LOCAL CODES AND ALL APPLICABLE ANSI STANDARDS.

Features and Specifications

- Tubing Annealed, 304 stainless steel (ASTM A240)
- Flare nuts. Brass or plated steel
- Adapters Brass or plated steel
Meets SAE J512 standard – 45° flare (with the exception of 15/16" – 16 threads of 5/8" OD)
- Optional coating Heavy-duty, antimicrobial, hot-dipped gray PVC (for 1/2" OD (21 series) and 5/8" OD (31 series only). *Coating will not hold a flame.*
- Approved for indoor and outdoor use
- Temperature rating with adapters: -40°F to 150°F
- Temperature rating with valves: -40°F to 125°F
- 100% Factory leak tested
- When installing a new appliance or when an existing appliance is moved to a new location a NEW gas connector must be used per manufacturer's installation instructions and per product standards ANSI Z21.24/CSA 6.10 and ANSI Z21.75/CSA 6.27.
- Avoid repeated bending, flexing, or extreme vibration. Do not use on portable gas generators due to excessive vibration.



1-800-DORMONT
www.dormont.com

Gas Range and Furnace Connectors 30 Series - 5/8" OD (1/2" ID)

Category A

Range/Furnace Connectors with Fittings

Not for use in Foodservice applications where movement is required for cleaning. Use an ANSI Z21.69 design certified gas connector.
(Contact Dormont for more information.)



Description		Part #	Length (When ordering, add length after the part number)							
			12"	18"	24"	30"	36"	48"	60"	72"
	3/4" MIP x 3/4" MIP	30-4141-	\$25.54	\$31.04	\$35.62	\$37.28	\$40.65	\$51.79	\$61.96	\$71.83
	1/2" MIP x 3/4" MIP	30-3141-	25.54	31.04	35.62	37.28	40.65	51.79	61.96	71.83
	1/2" MIP x 1/2" MIP	30-3131-	25.54	31.04	35.62	37.28	40.65	51.79	61.96	71.83
	3/4" FIP x 3/4" FIP	30-4242-	25.54	31.04	35.62	37.28	40.65	51.79	61.96	71.83
	1/2" FIP x 3/4" FIP	30-3242-	25.54	31.04	35.62	37.28	40.65	51.79	61.96	71.83
	1/2" FIP x 1/2" FIP	30-3232-	25.54	31.04	35.62	37.28	40.65	51.79	61.96	71.83
	1/2" MIP x 1/2" FIP	30-3132-	25.54	31.04	35.62	37.28	40.65	51.79	61.96	71.83
	1/2" MIP x 3/4" FIP	30-3142-	25.54	31.04	35.62	37.28	40.65	51.79	61.96	71.83
	3/4" MIP x 1/2" FIP	30-4132-	25.54	31.04	35.62	37.28	40.65	51.79	61.96	71.83
	3/4" MIP x 3/4" FIP	30-4142-	25.54	31.04	35.62	37.28	40.65	51.79	61.96	71.83
	3/4" MIP x 3/4" FIP (Elbow)	30-4144-	31.29	36.67	41.13	42.59	45.98	57.09	67.25	77.13
	Carton Qty./Approx. Carton Wt. Lbs.		25/24	25/26	25/27	25/29	25/31	25/34	12/20	12/20

Range/Furnace Connectors with Valves



Description		Part #	Length (When ordering, add length after the part number)							
			12"	18"	24"	30"	36"	48"	60"	72"
	3/4" FIP x 3/4" FIP Ball	30-4245-	\$56.28	\$62.82	\$66.92	\$67.26	\$71.52	\$82.95	\$94.71	\$105.34
	1/2" FIP x 3/4" FIP Ball	30-3245-	56.28	62.82	66.92	67.26	71.52	82.95	94.71	105.34
	3/4" FIP x 1/2" FIP Ball	30-4235-	56.28	62.82	66.92	67.26	71.52	82.95	94.71	105.34
	1/2" FIP x 1/2" FIP Ball	30-3235-	56.28	62.82	66.92	67.26	71.52	82.95	94.71	105.34
	3/4" MIP x 3/4" FIP Ball	30-4145-	56.28	62.82	66.92	67.26	71.52	82.95	94.71	105.34
	1/2" MIP x 3/4" FIP Ball	30-3145-	56.28	62.82	66.92	67.26	71.52	82.95	94.71	105.34
	3/4" MIP x 1/2" FIP Ball	30-4135-	56.28	62.82	66.92	67.26	71.52	82.95	94.71	105.34
	1/2" MIP x 1/2" FIP Ball	30-3135-	56.28	62.82	66.92	67.26	71.52	82.95	94.71	105.34
	3/4" FIP x 3/4" FIP Angle	30-4246-	81.11	86.12	89.72	91.68	93.63	104.87	116.73	127.40
	1/2" FIP x 3/4" FIP Angle	30-3246-	81.11	86.12	89.72	91.68	93.63	104.87	116.73	127.40
	3/4" MIP x 3/4" FIP Angle	30-4146-	81.11	86.12	89.72	91.68	93.63	104.87	116.73	127.40
	1/2" MIP x 3/4" FIP Angle	30-3146-	81.11	86.12	89.72	91.68	93.63	104.87	116.73	127.40
Carton Qty./Approx. Carton Wt. Lbs.			25/29	25/31	25/33	25/35	25/37	25/40	12/23	12/23

Coated Connectors – 31 Series with Heavy-Duty Gray PVC Coating

- Heavy-duty, hot dipped PVC coating provides protection against weather, UV, chemicals and other physical abuses.
- Antimicrobial agent prohibits the growth of mold and mildew.



Description		Part #	Length (When ordering, add length after the part number)					
			24"	30"	36"	48"	60"	72"
	5/8" OD (1/2" ID) tube with 1/2" MIP x 1/2" FIP Fittings	31-3132-	\$53.31	\$56.50	\$61.51	\$78.82	\$93.92	\$109.15
	Carton Qty./Approx. Carton Wt. Lbs.		25/24	25/27	25/30	25/45	12/25	12/28

Note: 30 series gas connectors have special 15/16" - 16 threads required for CSA design certification.

Note: Ideal for manufactured homes, see page 18.

Nut By Nut Connectors (NOT CSA DESIGN CERTIFIED)




Description		Part #	XX in part number = Length							
			10"	16"	22"	28"	34"	46"	58"	70"
	5/8" OD (1/2" ID) tube with 5/8" OD flare nuts (15/16"-16 thread)	30-9898-XXFP	\$22.29	\$26.26	\$30.12	\$31.62	\$34.78	\$44.12	\$52.54	\$61.22
	Carton Qty./Approx. Carton Wt. Lbs.		25/7	25/9	25/10	25/12	25/14	25/17	12/10	12/11

1-800-DORMONT
www.dormont.com





Dryer/Water Heater Connectors with Fittings



Description		Part #	Length (When ordering, add length after the part number)							
			12"	18"	24"	30"	36"	48"	60"	72"
	3/8" MIP x 3/8" MIP	20-2121-	\$24.62	\$29.81	\$34.04	\$36.46	\$40.16	\$48.63	\$59.75	\$68.04
	1/2" MIP x 1/2" MIP	20-3131-	24.62	29.81	34.04	36.46	40.16	48.63	59.75	68.04
	3/8" MIP x 1/2" MIP	20-2131-	24.62	29.81	34.04	36.46	40.16	48.63	59.75	68.04
	3/8" FIP x 3/8" FIP	20-2222-	24.62	29.81	34.04	36.46	40.16	48.63	59.75	68.04
	1/2" FIP x 1/2" FIP	20-3232-	24.62	29.81	34.04	36.46	40.16	48.63	59.75	68.04
	3/8" FIP x 1/2" FIP	20-2232-	24.62	29.81	34.04	36.46	40.16	48.63	59.75	68.04
	3/8" MIP x 3/8" FIP	20-2122-	24.62	29.81	34.04	36.46	40.16	48.63	59.75	68.04
	3/8" MIP x 1/2" FIP	20-2132-	24.62	29.81	34.04	36.46	40.16	48.63	59.75	68.04
	1/2" MIP x 3/8" FIP	20-3122-	24.62	29.81	34.04	36.46	40.16	48.63	59.75	68.04
	1/2" MIP x 1/2" FIP	20-3132-	24.62	29.81	34.04	36.46	40.16	48.63	59.75	68.04
Carton Qty./Approx. Carton Wt. Lbs.			25/16	25/18	25/19	25/21	25/22	25/26	12/14	12/16

Dryer/Water Heater Connectors with Valves




Description		Part #	Length (When ordering, add length after the part number)							
			12"	18"	24"	30"	36"	48"	60"	72"
	1/2" MIP x 1/2" FIP Ball	20-3135-	\$47.36	\$52.63	\$56.78	\$58.44	\$62.60	\$72.29	\$84.34	\$92.86
	3/8" MIP x 1/2" FIP Ball	20-2135-	47.36	52.63	56.78	58.44	62.60	72.29	84.34	92.86
	1/2" FIP x 1/2" FIP Ball	20-3235-	47.36	52.63	56.78	58.44	62.60	72.29	84.34	92.86
	3/8" FIP x 1/2" FIP Ball	20-2235-	47.36	52.63	56.78	58.44	62.60	72.29	84.34	92.86
Carton Qty./Approx. Carton Wt. Lbs.			25/23	25/25	25/26	25/28	25/29	25/33	12/17	12/19

Note: For poly-bagged connectors, consult Dormont for pricing.


Coated Connectors – 21 Series with Heavy-Duty Gray PVC Coating

- Heavy-duty, hot dipped PVC coating provides protection against weather, UV, chemicals and other physical abuses.
- Antimicrobial agent prohibits the growth of mold and mildew.



Description		Part#	Length (When ordering, add length after the part number)					
			24"	30"	36"	48"	60"	72"
	1/2" OD (3/8" ID) tube with 3/8" MIP x 3/8" FIP Fittings	21-2122-	\$50.76	\$55.16	\$60.67	\$73.79	\$90.40	\$103.08
	Carton Qty./Approx. Carton Wt. Lbs.		25/24	25/27	25/30	25/45	12/25	12/28

Nut By Nut Connectors (NOT CSA DESIGN CERTIFIED)

Description		Part #	XX in part number = Length							
			10"	16"	22"	28"	34"	46"	58"	70"
	1/2" OD (3/8" ID) tube with 1/2" OD flare nut	20-9898-XXFP	\$17.16	\$22.05	\$25.97	\$28.61	\$31.99	\$39.93	\$50.27	\$58.00
	Carton Qty./Approx. Carton Wt. Lbs.		25/5	25/6	25/8	25/9	25/11	25/14	12/8	12/9

Gas Log and Space Heater Connectors with Fittings



Description		Part #	Length (When ordering, add length after the part number)							
			12"	18"	24"	30"	36"	48"	60"	72"
	1/2" MIP x 1/2" MIP	10-3131-	\$22.81	\$26.29	\$28.16	\$30.70	\$34.11	\$45.12	\$53.21	\$61.00
	3/8" MIP x 1/2" MIP	10-2131-	22.81	26.29	28.16	30.70	34.11	45.12	53.21	61.00
	3/8" MIP x 3/8" MIP	10-2121-	22.81	26.29	28.16	30.70	34.11	45.12	53.21	61.00
	1/2" FIP x 1/2" FIP	10-3232-	22.81	26.29	28.16	30.70	34.11	45.12	53.21	61.00
	3/8" FIP x 1/2" FIP	10-2232-	22.81	26.29	28.16	30.70	34.11	45.12	53.21	61.00
	3/8" FIP x 3/8" FIP	10-2222-	22.81	26.29	28.16	30.70	34.11	45.12	53.21	61.00
	3/8" MIP x 3/8" FIP	10-2122-	22.81	26.29	28.16	30.70	34.11	45.12	53.21	61.00
	3/8" MIP x 1/2" FIP	10-2132-	22.81	26.29	28.16	30.70	34.11	45.12	53.21	61.00
	1/2" MIP x 3/8" FIP	10-3122-	22.81	26.29	28.16	30.70	34.11	45.12	53.21	61.00
	1/2" MIP x 1/2" FIP	10-3132-	22.81	26.29	28.16	30.70	34.11	45.12	53.21	61.00
Carton Qty./Approx. Carton Wt. Lbs.			25/13	25/14	25/15	25/17	25/18	25/20	12/11	12/12

Gas Log and Space Heater Connectors with Valves



Description		Part #	Length (When ordering, add length after the part number)							
			12"	18"	24"	30"	36"	48"	60"	72"
	1/2" MIP x 1/2" FIP Ball	10-3135-	\$45.29	\$49.05	\$50.80	\$52.57	\$56.40	\$68.27	\$76.94	\$85.61
	3/8" MIP x 1/2" FIP Ball	10-2135-	45.29	49.05	50.80	52.57	56.40	68.27	76.94	85.61
	1/2" FIP x 1/2" FIP Ball	10-3235-	45.29	49.05	50.80	52.57	56.40	68.27	76.94	85.61
	3/8" FIP x 1/2" FIP Ball	10-2235-	45.29	49.05	50.80	52.57	56.40	68.27	76.94	85.61
	1/2" MIP x 1/2" FIP Angle	10-3136-	61.87	65.30	66.56	67.69	71.52	83.43	92.05	100.72
	1/2" FIP x 1/2" FIP Angle	10-3236-	61.87	65.30	66.56	67.69	71.52	83.43	92.05	100.72
Carton Qty./Approx. Carton Wt. Lbs.			25/17	25/18	25/19	25/20	25/22	25/24	12/13	12/14

Note: For poly-bagged connectors, consult Dormont for pricing.


Nut By Nut Connectors (NOT CSA DESIGN CERTIFIED)

Description		Part #	XX in part number = Length							
			10"	16"	22"	28"	34"	46"	58"	70"
	3/8" OD (1/4" ID) tube with 3/8" OD flare nuts	10-9898-XXFP	\$15.92	\$19.40	\$21.72	\$24.39	\$27.58	\$37.29	\$45.76	\$52.12
	3/8" OD (1/4" ID) tube with 3/8" OD flare nuts (9/16"-24 thread)	19-9999-XXFP	15.92	19.40	21.72	24.39	27.58	37.29	45.76	52.12
	Carton Qty./Approx. Carton Wt. Lbs.		25/4	25/5	25/6	25/7	25/8	25/10	12/6	12/7



Coated Stainless Steel Gas Connectors

- Coating provides extra corrosion protection from accidental contact with common household chemicals.
- Consistent coverage provides protection along the entire length of the connector.
- Yellow is the industry-recognized color for gas line identification.
- Same flow capacity as uncoated (see page 4).

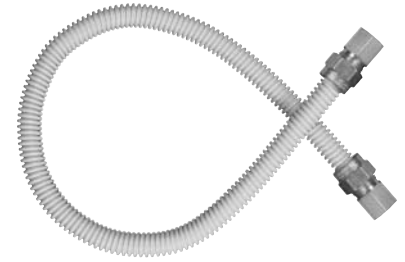

Coated Range/Furnace Connectors with Fittings

Description	Part #	Length (When ordering, add length after the part number)							
		12"	18"	24"	30"	36"	48"	60"	72"
	3/4" MIP x 3/4" MIP	\$27.09	\$32.92	\$37.76	\$39.51	\$43.11	\$54.89	\$65.67	\$76.15
	1/2" MIP x 3/4" MIP	27.09	32.92	37.76	39.51	43.11	54.89	65.67	76.15
	1/2" MIP x 1/2" MIP	27.09	32.92	37.76	39.51	43.11	54.89	65.67	76.15
	3/4" FIP x 3/4" FIP	27.09	32.92	37.76	39.51	43.11	54.89	65.67	76.15
	1/2" FIP x 3/4" FIP	27.09	32.92	37.76	39.51	43.11	54.89	65.67	76.15
	1/2" FIP x 1/2" FIP	27.09	32.92	37.76	39.51	43.11	54.89	65.67	76.15
	1/2" MIP x 1/2" FIP	27.09	32.92	37.76	39.51	43.11	54.89	65.67	76.15
	1/2" MIP x 3/4" FIP	27.09	32.92	37.76	39.51	43.11	54.89	65.67	76.15
	3/4" MIP x 1/2" FIP	27.09	32.92	37.76	39.51	43.11	54.89	65.67	76.15
	3/4" MIP x 3/4" FIP	27.09	32.92	37.76	39.51	43.11	54.89	65.67	76.15
	3/4" MIP x 3/4" FIP (Elbow)	33.30	39.88	46.14	48.15	52.20	63.84	74.62	84.63
Carton Qty./Approx. Carton Wt. Lbs.		25/25	25/27	25/29	25/31	25/33	25/36	12/20	12/21

Coated Range/Furnace Connectors with Valves





Description	Part #	Length (When ordering, add length after the part number)							
		12"	18"	24"	30"	36"	48"	60"	72"
	3/4" FIP x 3/4" FIP Ball	\$59.66	\$66.59	\$70.93	\$71.30	\$75.81	\$87.93	\$100.39	\$111.66
	1/2" FIP x 3/4" FIP Ball	59.66	66.59	70.93	71.30	75.81	87.93	100.39	111.66
	3/4" FIP x 1/2" FIP Ball	59.66	66.59	70.93	71.30	75.81	87.93	100.39	111.66
	1/2" FIP x 1/2" FIP Ball	59.66	66.59	70.93	71.30	75.81	87.93	100.39	111.66
	3/4" MIP x 3/4" FIP Ball	59.66	66.59	70.93	71.30	75.81	87.93	100.39	111.66
	1/2" MIP x 3/4" FIP Ball	59.66	66.59	70.93	71.30	75.81	87.93	100.39	111.66
	3/4" MIP x 1/2" FIP Ball	59.66	66.59	70.93	71.30	75.81	87.93	100.39	111.66
	1/2" MIP x 1/2" FIP Ball	59.66	66.59	70.93	71.30	75.81	87.93	100.39	111.66
	3/4" FIP x 3/4" FIP Angle	85.97	91.29	95.10	97.17	99.24	111.17	123.72	135.05
	1/2" FIP x 3/4" FIP Angle	85.97	91.29	95.10	97.17	99.24	111.17	123.72	135.05
	3/4" MIP x 3/4" FIP Angle	85.97	91.29	95.10	97.17	99.24	111.17	123.72	135.05
	1/2" MIP x 3/4" FIP Angle	85.97	91.29	95.10	97.17	99.24	111.17	123.72	135.05
Carton Qty./Approx. Carton Wt. Lbs.		25/31	25/32	25/34	25/36	25/38	25/41	12/22	12/23

Note: 30 series gas connectors have special 15/16" - 16 threads required for CSA design certification.




Nut By Nut Coated Connectors (NOT CSA DESIGN CERTIFIED)

Description	Part #	XX in part number = Length							
		10"	16"	22"	28"	34"	46"	58"	70"
	5/8" OD (1/2" ID) tube with 5/8" OD flare nuts (15/16" - 16 thread)	\$23.64	\$27.84	\$31.94	\$33.51	\$36.87	\$46.77	\$55.69	\$64.89
	Carton Qty./Approx. Carton Wt. Lbs.	25/10	25/11	25/12	25/15	25/16	25/20	12/12	12/13



Coated Dryer/Water Heater Connectors with Fittings

	Description	Part #	Length (When ordering, add length after the part number)							
			12"	18"	24"	30"	36"	48"	60"	72"
	3/8" MIP x 3/8" MIP	20C-2121-	\$26.08	\$31.58	\$36.07	\$38.65	\$42.58	\$51.56	\$63.35	\$72.10
	1/2" MIP x 1/2" MIP	20C-3131-	26.08	31.58	36.07	38.65	42.58	51.56	63.35	72.10
	3/8" MIP x 1/2" MIP	20C-2131-	26.08	31.58	36.07	38.65	42.58	51.56	63.35	72.10
	3/8" FIP x 3/8" FIP	20C-2222-	26.08	31.58	36.07	38.65	42.58	51.56	63.35	72.10
	1/2" FIP x 1/2" FIP	20C-3232-	26.08	31.58	36.07	38.65	42.58	51.56	63.35	72.10
	3/8" FIP x 1/2" FIP	20C-2232-	26.08	31.58	36.07	38.65	42.58	51.56	63.35	72.10
	3/8" MIP x 3/8" FIP	20C-2122-	26.08	31.58	36.07	38.65	42.58	51.56	63.35	72.10
	3/8" MIP x 1/2" FIP	20C-2132-	26.08	31.58	36.07	38.65	42.58	51.56	63.35	72.10
	1/2" MIP x 3/8" FIP	20C-3122-	26.08	31.58	36.07	38.65	42.58	51.56	63.35	72.10
	1/2" MIP x 1/2" FIP	20C-3132-	26.08	31.58	36.07	38.65	42.58	51.56	63.35	72.10
Carton Qty./Approx. Carton Wt. Lbs.			25/18	25/19	25/20	25/22	25/24	25/27	12/14	12/16

Coated Dryer/Water Heater Connectors with Valves

	Description	Part #	Length (When ordering, add length after the part number)							
			12"	18"	24"	30"	36"	48"	60"	72"
	1/2" MIP x 1/2" FIP Ball	20C-3135-	\$50.20	55.79	\$60.19	\$61.95	\$66.37	\$76.64	\$89.40	\$98.43
	3/8" MIP x 1/2" FIP Ball	20C-2135-	50.20	55.79	60.19	61.95	66.37	76.64	89.40	98.43
	1/2" FIP x 1/2" FIP Ball	20C-3235-	50.20	55.79	60.19	61.95	66.37	76.64	89.40	98.43
	3/8" FIP x 1/2" FIP Ball	20C-2235-	50.20	55.79	60.19	61.95	66.37	76.64	89.40	98.43
Carton Qty./Approx. Carton Wt. Lbs.			25/25	25/26	25/27	25/29	25/31	25/34	12/18	12/20


Nut By Nut Coated Connectors (NOT CSA DESIGN CERTIFIED)

	Description	Part #	XX in part number = Length							
			10"	16"	22"	28"	34"	46"	58"	70"
	1/2" OD tube with 1/2" OD flare nuts	20C-9898-XXFP	\$18.17	\$23.37	\$27.52	\$30.33	\$33.93	\$42.32	\$53.29	\$61.48
	Carton Qty./Approx. Carton Wt. Lbs.		25/7	25/9	25/10	25/12	25/13	25/16	12/10	12/11


10 SERIES

Space Heater and Wall Heater – Yellow Safety Shield Coating – 3/8" OD (1/4" ID)
Category K


Coated Space Heater and Wall Heater Connectors

	Description	Part #	Length (When ordering, add length after the part number)							
			12"	18"	24"	30"	36"	48"	60"	72"
	1/2" MIP x 1/2" MIP	10C-3131-	\$24.18	\$27.87	\$29.85	\$32.56	\$36.16	\$47.83	\$56.40	\$64.66
	3/8" MIP x 1/2" MIP	10C-2131-	24.18	27.87	29.85	32.56	36.16	47.83	56.40	64.66
	3/8" MIP x 3/8" MIP	10C-2121-	24.18	27.87	29.85	32.56	36.16	47.83	56.40	64.66
	1/2" FIP x 1/2" FIP	10C-3232-	24.18	27.87	29.85	32.56	36.16	47.83	56.40	64.66
	3/8" FIP x 1/2" FIP	10C-2232-	24.18	27.87	29.85	32.56	36.16	47.83	56.40	64.66
	3/8" FIP x 3/8" FIP	10C-2222-	24.18	27.87	29.85	32.56	36.16	47.83	56.40	64.66
	3/8" MIP x 3/8" FIP	10C-2122-	24.18	27.87	29.85	32.56	36.16	47.83	56.40	64.66
	3/8" MIP x 1/2" FIP	10C-2132-	24.18	27.87	29.85	32.56	36.16	47.83	56.40	64.66
	1/2" MIP x 3/8" FIP	10C-3122-	24.18	27.87	29.85	32.56	36.16	47.83	56.40	64.66
	1/2" MIP x 1/2" FIP	10C-3132-	24.18	27.87	29.85	32.56	36.16	47.83	56.40	64.66
Carton Qty./Approx. Carton Wt. Lbs.			25/14	25/16	25/17	25/18	25/19	25/21	12/12	12/13

Coated Space Heater and Wall Heater Connectors with Valves

	Description	Part #	Length (When ordering, add length after the part number)							
			12"	18"	24"	30"	36"	48"	60"	72"
	1/2" MIP x 1/2" FIP Ball	10C-3135-	\$48.01	\$51.99	\$53.83	\$55.73	\$59.79	\$72.38	\$81.56	\$90.76
	3/8" MIP x 1/2" FIP Ball	10C-2135-	48.01	51.99	53.83	55.73	59.79	72.38	81.56	90.76
	1/2" FIP x 1/2" FIP Ball	10C-3235-	48.01	51.99	53.83	55.73	59.79	72.38	81.56	90.76
	3/8" FIP x 1/2" FIP Ball	10C-2235-	48.01	51.99	53.83	55.73	59.79	72.38	81.56	90.76
	1/2" MIP x 1/2" FIP Angle	10C-3136-	65.58	69.22	70.56	71.75	75.81	88.44	97.59	106.76
	1/2" FIP x 1/2" FIP Angle	10C-3236-	65.58	69.22	70.56	71.75	75.81	88.44	97.59	106.76
Carton Qty./Approx. Carton Wt. Lbs.			25/18	25/19	25/20	25/22	25/23	25/25	12/14	12/15

Nut By Nut Coated Connectors (NOT CSA DESIGN CERTIFIED)

	Description	Part #	XX in part number = Length							
			10"	16"	22"	28"	34"	46"	58"	70"
	3/8" OD (1/4" ID) tube with 3/8" OD flare nut	10C-9898-XXFP	\$16.87	\$20.57	\$23.03	\$25.86	\$29.23	\$39.51	\$48.51	\$55.25
	3/8" OD (1/4" ID) tube with 3/8" OD flare nuts (9/16"-24 fine thread)	19C-9999-XXFP	16.87	20.57	23.03	25.86	29.23	39.51	48.51	55.25
Carton Qty./Approx. Carton Wt. Lbs.			25/6	25/7	25/8	25/10	25/11	25/13	12/8	12/9

Design Certifications and Approvals

- ANSI Z21.24/CSA 6.10 – Connectors for Gas Appliances
- ANSI Z21.75/CSA 6.27 – Connectors for Outdoor Appliances and Manufactured Homes
- City of New York – MEA #376-92-M
- Approved by the Commonwealth of Massachusetts Board of State Examiners of Plumbers and Gas Fitters – *connector length may not exceed 36"*.

ALL INSTALLATIONS MUST COMPLETELY COMPLY WITH ALL DORMONT MANUFACTURING COMPANY WARNINGS AND INSTRUCTIONS, NATIONAL, STATE AND LOCAL CODES AND ALL APPLICABLE ANSI STANDARDS.

Features and Specifications

- Tubing Annealed, 304 stainless steel (ASTM A240)
- Coating Custom Formulated Polymer
- Flare nuts Brass or plated steel
- Adapters Brass or plated steel
Meets SAE J512 standard – 45° flare (with the exception of 15/16" – 16 threads of 5/8" OD)
- Approved for indoor and outdoor use
- Temperature rating of connector with adapters: -40°F to 150°F
- Temperature rating with valves: -40°F to 125°F
- 100% factory leak tested
- When installing a new appliance or when an existing appliance is moved to a new location a NEW gas connector must be used per manufacturer's installation instructions and per product standards ANSI Z21.24/CSA 6.10 and ANSI Z21.75/CSA 6.27.
- **Not engineered for high temperature applications such as gas logs, fireplace inserts or free-standing fireplaces**
- Not suitable for moveable installations. Not NSF certified
- Avoid repeated bending, flexing, or extreme vibration. Do not use on portable gas generators due to excessive vibration



1-800-DORMONT
www.dormont.com



Specifically engineered for high-temperature applications such as gas logs, fireplace inserts, and free-standing fireplaces

- Designed to reduce glare and hide the connector from view to enhance the beauty of the hearth.
- Hi-temperature black coating hides the connector while withstanding up to 350°F.
- Black adapters and flare nuts are plated with zinc di-chromate to further reduce the visibility of the gas connection.

Connector Minimum Flow Capacity – For Natural Gas (per ANSI Z21.24/CSA 6.10 & ANSI Z21.75/CSA 6.27)							
Straight Length Capacity – BTU per Hr 0.64 SG., 1000 BTU per Cu. Ft. at 0.5 inch Water Column Pressure Drop							
Series	Nominal OD (in)	Nominal ID (in)	12"	18"	24"	30"	36"
10	3/8"	1/4"	48,000	43,800	40,000	36,400	33,400
20	1/2"	3/8"	102,000	93,100	85,000	77,100	71,100

Connector Minimum Flow Capacity – For Propane Gas (per ANSI Z21.24/CSA 6.10 & ANSI Z21.75/CSA 6.27)							
Straight Length Capacity – BTU per Hr 1.55 SG., 2500 BTU per Cu. Ft. at 0.5 inch Water Column Pressure Drop							
Series	Nominal OD (in)	Nominal ID (in)	12"	18"	24"	30"	36"
10	3/8"	1/4"	76,800	70,080	64,000	58,240	53,440
20	1/2"	3/8"	163,200	148,960	136,000	123,360	113,760

Note: When using 0.2 water column pressure drop, capacity can be determined by multiplying the values above by 0.632 (for both natural and propane gas). For capacities other than noted, contact Dormont at 1-800-DORMONT.

Coating reduces glare and hides the connector from view

Black adapters and flare nuts further reduce visibility of the connector

Black coating withstands up to 350°F

Exclusive No-Neck® design provides protection against stress fractures

More corrugations per inch increase flexibility and extend service life



Design Certifications and Approvals

- ANSI Z21.24/CSA 6.10 – Connectors for Gas Appliances
- ANSI Z21.75/CSA 6.27 – Connectors for Outdoor Appliances and Manufactured Homes
- City of New York – MEA #376-92-M
- Approved by the Commonwealth of Massachusetts Board of State Examiners of Plumbers and Gas Fitters – *connector length may not exceed 36"*

ALL INSTALLATIONS MUST COMPLETELY COMPLY WITH ALL DORMONT MANUFACTURING COMPANY WARNINGS AND INSTRUCTIONS, NATIONAL, STATE AND LOCAL CODES AND ALL APPLICABLE ANSI STANDARDS.

Features and Specifications

- Tubing Annealed, 304 stainless steel (ASTM A240)
- Coating Black coating. Maximum temperature rating: 350°F
- Flare nuts. Brass or steel with black zinc di-chromate plating
- Adapters Brass or Steel with black zinc di-chromate plating
- Approved for indoor and outdoor use
- Designed for high-temperature applications up to 350°F.
- 100% factory leak tested.
- When installing a new appliance or when an existing appliance is moved to a new location a NEW gas connector must be used per manufacturer's installation instructions and per product standards ANSI Z21.24/CSA 6.10 and ANSI Z21.75/CSA 6.27.
- Avoid repeated bending, flexing, or extreme vibration. Do not use on portable gas generators due to excessive vibration






1-800-DORMONT
www.dormont.com






10A Series – 3/8" OD (1/4" ID) Black Coated Connectors




Description		Length (when ordering, add length after the part number)					
		Part #	12"	18"	24"	30"	36"
	3/8" MIP x 3/8" MIP	10A-2121-	\$25.15	\$28.60	\$31.92	\$34.96	\$38.94
	3/8" MIP x 1/2" MIP	10A-2131-	25.15	28.60	31.92	34.96	38.94
	1/2" MIP x 1/2" MIP	10A-3131-	25.15	28.60	31.92	34.96	38.94
	3/8" MIP x 3/8" FIP	10A-2122-	25.15	28.60	31.92	34.96	38.94
	3/8" MIP x 1/2" FIP	10A-2132-	25.15	28.60	31.92	34.96	38.94
	1/2" MIP x 3/8" FIP	10A-3122-	25.15	28.60	31.92	34.96	38.94
	1/2" MIP x 1/2" FIP	10A-3132-	25.15	28.60	31.92	34.96	38.94
	Carton Qty./Approx. Carton Wt. Lbs.		25/10	25/11	25/12	25/14	25/18
	3/8" MIP x 1/2" FIP ball valve	10A-2135-	\$48.43	\$52.44	\$56.74	\$58.71	\$67.07
	1/2" MIP x 1/2" FIP ball valve	10A-3135-	48.43	52.44	56.74	58.71	67.07
	Carton Qty./Approx. Carton Wt. Lbs.		25/15	25/16	25/17	25/18	25/22

20A Series – 1/2" OD (3/8" ID) Black Coated Connectors



Description		Length (when ordering, add length after the part number)					
		Part #	12"	18"	24"	30"	36"
	3/8" MIP x 3/8" MIP	20A-2121-	\$27.13	\$32.42	\$38.51	\$41.41	\$45.40
	3/8" MIP x 1/2" MIP	20A-2131-	27.13	32.42	38.51	41.41	45.40
	1/2" MIP x 1/2" MIP	20A-3131-	27.13	32.42	38.51	41.41	45.40
	3/8" MIP x 3/8" FIP	20A-2122-	27.13	32.42	38.51	41.41	45.40
	3/8" MIP x 1/2" FIP	20A-2132-	27.13	32.42	38.51	41.41	45.40
	1/2" MIP x 3/8" FIP	20A-3122-	27.13	32.42	38.51	41.41	45.40
	1/2" MIP x 1/2" FIP	20A-3132-	27.13	32.42	38.51	41.41	45.40
	Carton Qty./Approx. Carton Wt. Lbs.		25/12	25/13	25/15	25/17	25/18
	3/8" MIP x 1/2" FIP ball valve	20A-2135-	\$50.63	\$56.28	\$63.41	\$65.28	\$74.46
	1/2" MIP x 1/2" FIP ball valve	20A-3135-	50.63	56.28	63.41	65.28	74.46
	Carton Qty./Approx. Carton Wt. Lbs.		25/22	25/23	25/25	25/26	25/28

Nut by Nut Black Coated Connectors (NOT CSA DESIGN CERTIFIED)

Description		XX in part number = Length					
		Part #	10"	16"	22"	28"	34"
	3/8" OD / 1/4" ID	10A-5858-XXFP	\$18.63	\$22.73	\$25.84	\$29.02	\$32.79
	Carton Qty./Approx. Carton Wt. Lbs.		25/6	25/7	25/8	25/10	25/11
	1/2" OD / 3/8" ID	20A-5858-XXFP	\$20.08	\$25.80	\$29.65	\$34.04	\$36.52
	Carton Qty./Approx. Carton Wt. Lbs.		25/6	25/8	25/9	25/11	25/13



Whisperflex™



Eliminates the annoying whistle in high BTU gas applications.

10ANW Series – 3/8" OD (1/4" ID) Black Coated, Non-Whistling Connectors



Description		Length (when ordering, add length after the part number)			
		Part #	12"	18"	24"
	3/8" MIP x 1/2" MIP	10ANW-2131	\$31.61	\$35.94	\$41.66
	3/8" MIP x 1/2" FIP	10ANW-2132	31.61	35.94	41.66
	3/8" MIP x 1/2" FIP ball valve	10ANW-2135	54.02	58.28	62.36
Carton Qty./Approx. Carton Wt. Lbs.			25/15	25/16	25/17

20ANW Series – 1/2" OD (3/8" ID) Black Coated, Non-Whistling Connectors



Description		Length (when ordering, add length after the part number)			
		Part #	12"	18"	24"
	3/8" MIP x 1/2" MIP	20ANW-2131	\$37.97	\$46.48	\$54.10
	3/8" MIP x 1/2" FIP	20ANW-2132	37.97	46.48	54.10
	1/2" MIP x 1/2" FIP	20ANW-3132	37.97	46.48	54.10
	3/8" MIP x 1/2" FIP ball valve	20ANW-2135	57.84	64.12	71.25
Carton Qty./Approx. Carton Wt. Lbs.			25/15	25/16	25/17

Nut by Nut (Not CSA Approved)

Description		XX in part number = Length			
		Part #	10"	16"	22"
	3/8" OD (1/4" ID) with 3/8" OD Flare Nuts	10ANW-5858-XXFP	\$25.39	\$28.88	\$32.22
	1/2" OD (3/8" ID) with 1/2" OD Flare Nuts	20ANW-5858-XXFP	30.50	37.35	41.84
Carton Qty./Approx. Carton Wt. Lbs.			25/15	25/16	25/17

Applications

- Boilers
- Gas Meters
- Furnaces
- Commercial Water Heaters
- Gas packs/Rooftop HVAC units
- Tankless Water Heater
- Stationary Standby Gas Generators *
- Specifically designed for application with a significant BTU requirement. Can supply up to 1.5 million BTU (natural gas) or 2.4 million (propane), depending on length.
- Eliminates the need for pipe nipples, 90's and elbows.
- Pre-fabricated gas connector means no field threading, cutting or assembly of CSST fitting and tubing.
- Available with hot-dipped PVC coating with antimicrobial agent, Safety Shield yellow coating, or Stainless Steel.

Designed for high BTU demand

Exclusive No-Neck® design increases flexibility

CSA design-certified

Durable 304 stainless steel tubing

More corrugations per inch increase flexibility and extend service life



Connector Minimum Flow Capacity – For Natural Gas (per ANSI Z21.24/CSA 6.10 & ANSI Z21.75/CSA 6.27)										
Straight Length Capacity – BTU per Hr 0.64 SG., 1000 BTU per Cu. Ft. at 0.5 inch Water Column Pressure Drop										
Series	Nominal OD (in)	Nominal ID (in)	12"	18"	24"	30"	36"	48"	60"	72"
40/41/40C	1"	3/4"	349,000	318,500	290,900	270,500	255,900	215,000	197,400	173,900
50/51	1-1/4"	1"	698,000	637,000	581,800	545,200	515,900	442,700	398,900	347,800
60/61	1-1/2"	1-1/4"	1,500,000	————	1,470,000	————	1,200,000	1,130,000	960,000	930,000

Connector Minimum Flow Capacity – For Propane Gas (per ANSI Z21.24/CSA 6.10 & ANSI Z21.75/CSA 6.27)										
Straight Length Capacity – BTU per Hr 1.55 SG., 2500 BTU per Cu. Ft. at 0.5 inch Water Column Pressure Drop										
Series	Nominal OD (in)	Nominal ID (in)	12"	18"	24"	30"	36"	48"	60"	72"
40/41/40C	1"	3/4"	558,400	509,600	465,440	432,800	409,440	344,000	315,840	278,240
50/51	1-1/4"	1"	1,116,800	1,019,200	930,880	872,320	825,440	708,320	638,240	556,480
60/61	1-1/2"	1-1/4"	2,400,000	————	2,352,000	————	1,920,000	1,808,000	1,536,000	1,488,000

NOTE: When using 0.2 water column pressure drop, capacity can be determined by multiplying the values above by 0.632 (for both natural and propane gas). For capacities at other than noted, contact Dormont at 1-800-DORMONT.

Approvals and Certifications

- ANSI Z21.24/CSA 6.10 – Connectors for Gas Appliances
- ANSI Z21.75/CSA 6.27 – Connectors for Outdoor Appliances and Manufactured Homes
- City of New York – MEA #376-92-M
- Approved by the Commonwealth of Massachusetts Board of State Examiners of Plumbers and Gas Fitters – *connector length may not exceed 36"*.
- * Tested and passed vibration criteria set forth in UL2200, section 35.1.3.3, "Stationary Engine Generator Assemblies," and UL536, section 7, "Flexible Metallic Hose."

ALL INSTALLATIONS MUST COMPLETELY COMPLY WITH ALL DORMONT MANUFACTURING COMPANY WARNINGS AND INSTRUCTIONS, NATIONAL, STATE AND LOCAL CODES AND ALL APPLICABLE ANSI STANDARDS.



40/41, 50/51 and 60/61 series only are IAPMO approved



1-800-DORMONT
www.dormont.com

Features and Specifications

- Tubing Annealed, 304 stainless steel (ASTM A240)
- Flare nuts. Brass or plated steel
- Adapters Brass or plated steel
- Optional coating . . . Heavy-duty, antimicrobial, hot-dipped gray PVC (41, 51 & 61 series). Coating will not hold a flame.
- Approved for indoor and outdoor use
- Operating temperature with adapters: -40°F to 150°F
- 100% leak tested
- When installing a new appliance or when an existing appliance is moved to a new location a NEW gas connector must be used per manufacturer's installation instructions and per product standards ANSI Z21.24/CSA 6.10 and ANSI Z21.75/CSA 6.27.
- Avoid repeated bending, flexing, or extreme vibration. Do not use on portable gas generators due to excessive vibration
- Not suitable for moveable installations. Not NSF certified.



PVC coated for unmatched corrosion and UV protection

41 Series – 1" OD (3/4" ID)



Description	Length (When ordering, add length after the part number)								
	Part #	12"	18"	24"	30"	36"	48"	60"	72"
3/4" MIP x 3/4" FIP with PVC coating	41-4142-	\$75.86	\$77.78	\$80.54	\$87.71	\$95.07	\$109.91	\$119.03	\$135.35
Carton Qty./Approx. Carton Wt. Lbs.		15/21	15/23	15/26	15/28	15/30	15/49	6/24	6/33

51 Series - 1-1/4" OD (1" ID)



Description	Length (When ordering, add length after the part number)								
	Part #	12"	18"	24"	30"	36"	48"	60"	72"
1" MIP x 1" FIP with PVC coating	51-5152-	\$105.66	\$108.92	\$110.82	\$120.95	\$130.81	\$145.18	\$165.57	\$187.11
Carton Qty./Approx. Carton Wt. Lbs.		10/18	10/22	10/25	10/31	10/36	10/48	6/31	6/36

61 Series – 1-1/2" OD (1-1/4" ID)



Description	Length (When ordering, add length after the part number)								
	Part #	12"	18"	24"	30"	36"	48"	60"	72"
1-1/4" MIP x 1-1/4" FIP with PVC coating	61-6162-	\$143.73	\$147.89	\$150.34	\$163.71	\$173.75	\$193.79	\$213.86	\$233.88
Carton Qty./Approx. Carton Wt. Lbs.		10/30	10/34	10/37	10/40	10/44	10/52	6/36	6/41



Safety Shield® Yellow Coated High Btu Stainless Steel Gas Connectors

- Coating provides extra corrosion protection from accidental contact with common household chemicals.
- The industry-recognized color for gas line identification.



40C Series – 1" OD (3/4" ID)

Description	Length (When ordering, add length after the part number)						
	Part #	24"	30"	36"	48"	60"	72"
3/4" MIP x 3/4" FIP	40C-4142-	\$78.27	85.89	\$91.76	\$105.90	\$113.77	—
Carton Qty./Approx. Carton Wt. Lbs.		15/26	15/28	15/30	15/49	6/24	6/33



High Btu Stainless Steel Gas Connectors

- Naturally corrosion-resistant 304 stainless steel
- Rated for indoor or outdoor use.



40 Series – 1" OD (3/4" ID)



Description	Length (When ordering, add length after the part number)								
	Part #	12"	18"	24"	30"	36"	48"	60"	72"
3/4" MIP x 3/4" FIP	40-4142-	\$68.89	\$71.43	\$73.84	\$81.04	\$86.56	\$99.90	\$107.32	\$121.93
Carton Qty./Approx. Carton Wt. Lbs.		15/15	15/17	15/20	15/23	15/28	15/34	6/14	6/18

50 - 1-1/4" OD (1" ID)



Description	Length (When ordering, add length after the part number)								
	Part #	12"	18"	24"	30"	36"	48"	60"	72"
1" MIP x 1" FIP	50-5152-	\$97.66	\$101.54	\$104.15	\$115.28	\$122.46	\$135.16	\$153.83	\$173.75
Carton Qty./Approx. Carton Wt. Lbs.		10/11	10/14	10/17	10/19	10/22	10/27	6/17	6/20

60 – 1-1/2" OD (1-1/4" ID)



Description	Length (When ordering, add length after the part number)								
	Part #	12"	18"	24"	30"	36"	48"	60"	72"
1-1/4" MIP x 1-1/4" FIP	60-6162-	\$134.98	\$137.64	\$140.30	\$152.02	\$160.51	\$178.72	\$197.14	\$215.51
Carton Qty./Approx. Carton Wt. Lbs.		10/17	10/19	10/22	10/24	10/27	10/31	6/22	6/25

Increase Profits with these Consumer-Friendly Kits

- This easy, add-on sale provides a good revenue and profit opportunity.
- Includes all components needed for a complete installation to make appliance installations quick and easy.
- Color-coding makes identification and selection easy.
- Space-saving poly-bags.
- Peg hook or cut-case display option available.

Gas Water Heater and Dryer Connector Kits



Part#	Contents	Carton Wt.	#Pcs. Per Carton	Price Each
20-3122KIT-48B	(1) 1/2" OD x 48" stainless steel gas connector Three (3) fittings: (1) 1/2" male pipe thread (tapped 3/8" female pipe thread) (1) 3/8" female pipe thread (1) 3/4" male pipe thread (tapped 1/2" female pipe thread) (1) Pipe thread sealant (1) Leak test solution (1) Detailed installation guide	6.1	5	\$73.54

For shut-off valves, see page 21.




Gas Range and Furnace Connector Kits



Part#	Contents	Carton Wt.	#Pcs. Per Carton	Price Each
30-3131KIT-48B	(1) 5/8" OD x 48" stainless steel gas connector Three (3) fittings: (2) 1/2" male pipe thread (tapped 3/8" female pipe thread) (1) 3/4" male pipe thread (tapped 1/2" female pipe thread) (1) Pipe thread sealant (1) Leak test solution (1) Detailed installation guide	6.3	5	\$75.13


For shut-off valves, see page 21.



Gas Log and Space Heater Connector Kits



Part#	Contents	Carton Wt.	#Pcs. Per Carton	Price Each
10A-2131KIT-24B	(1) 3/8" OD x 24" black coated gas connector Three (3) fittings: (2) 1/2" OD flare x 1/2" FIP (1) 3/8" OD flare x 1/2" FIP (1) Pipe thread sealant (1) Leak test solution (1) Detailed installation guide	6.3	5	\$72.07




Applications


- From 1st stage regulator on LP tank to riser
- From riser to 2nd stage regulator at the home
- From LP tank to home

Advantages

- Safe and easy alternative to typical copper or polyethylene connectors
- Increase productivity with quick installation because fittings are already attached
- No cutting or flaring of copper needed which saves time and material
- 304 stainless steel tubing significantly reduces the chance of the material work hardening as opposed to copper tubing
- Heavy-duty, hot-dipped gray PVC coating for extra strength and protection against corrosion

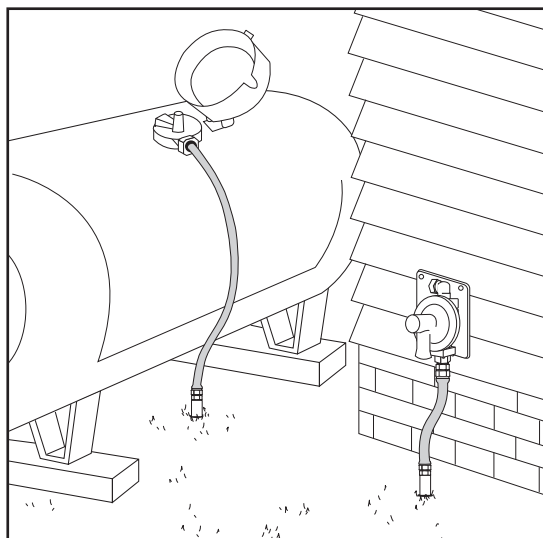

Description	Part #	Length (When ordering, add length after the part number)				
		22"	34"	46"	58"	70"
5/8" OD Propane Connector without Fittings	31P-7777-	\$39.92	\$47.82	\$60.36	\$70.67	\$80.87
Carton Qty/ Approx. Carton Wt. Lbs.		25/19	25/26	25/31	12/19	12/21



Description	Part #	Length (When ordering, add length after the part number)				
		24"	36"	48"	60"	72"
5/8" OD Propane Connector with Fittings (1/2" MIP x 1/2" FIP)	31P-31P32P-	\$53.03	\$61.51	\$75.60	\$86.70	\$97.50
Carton Qty/ Approx. Carton Wt. Lbs.		25/24	25/31	25/39	12/20	12/25

Testing

- Intended for use under the guidelines of NFPA 58
- Developed in accordance to the selected sections of the following specifications:
 - UL 569 – Aerostatic Leakage Test, Hydrostatic Strength Test – Pull Force Test
 - ASTM B154 – Mercurous Nitrate Test for Copper and Copper Alloys
 - ANSI Z21.24 – Bending and Torsion Tests
 - ANSI Z21.75 – Leakage Performance after Exposure to Temperature Extremes


ALL INSTALLATIONS MUST COMPLETELY COMPLY WITH ALL DORMONT MANUFACTURING COMPANY WARNINGS AND INSTRUCTIONS, NATIONAL, STATE AND LOCAL CODES AND ALL APPLICABLE ANSI STANDARDS.

Features and Specifications

- Tubing:Annealed, 304 stainless steel (ASTM A240), 5/8" OD
- Flare nuts:5/8" Forged Brass SAE 45°
- Adapters:5/8" Brass SAE 45°
- Coating:Heavy-duty, antimicrobial, hot-dipped gray PVC
- Maximum Pressure Rating:15 PSIG
- Operating temperature:-40°F to 150°F
- 100% factory leak tested

Installation And Usage

- For outdoor LP-gas connection only
- This is not an appliance connector
- DO NOT attempt to assemble union flare nuts directly to the NPT threads
- Not for use with natural gas
- Not suitable for underground piping




Standard Gas Connector Kits

Part #	Description	Price
7010-3132	(1) #30-3132-24" Gas Connector (1/2" MIP x 1/2" FIP) 1/2" SnapFast™ quick-disconnect, (1) Dust Cap and Dust Plug, (1) Warning Tag	\$125.73
7020-4142	(1) #30-4142-24" Gas Connector (3/4" MIP x 3/4" FIP) 3/4" SnapFast quick-disconnect, (1) Dust Cap and Dust Plug, (1) Warning Tag	171.18
7030-4142	(1) #40-4142-24" Gas Connector (3/4" MIP x 3/4" FIP) 3/4" SnapFast quick-disconnect, (1) Dust Cap and Dust Plug, (1) Warning Tag	222.02



Kits with a Gas Connector with Hot-Dipped Gray PVC Coating

Part #	Description	Price
7110-3132	(1) #31-3132-24" Gas Connector (1/2" MIP x 1/2" FIP) 1/2" SnapFast quick-disconnect, (1) Dust Cap and Dust Plug, (1) Warning Tag	\$131.06
7120-4142	(1) #31-4142-24" Gas Connector (3/4" MIP x 3/4" FIP) 3/4" SnapFast quick-disconnect, (1) Dust Cap and Dust Plug, (1) Warning Tag	175.19
7130-4142	(1) #41-4142-24" Gas Connector (3/4" MIP x 3/4" FIP) 3/4" SnapFast quick-disconnect, (1) Dust Cap and Dust Plug, (1) Warning Tag	230.02

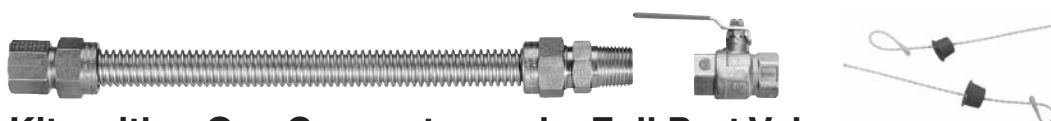

Kits with a Gas Connector and a Full Port Valve




Part #	Description	Price
7011-3132	(1) #30-3132-24" Gas Connector (1/2" MIP x 1/2" FIP) (1) 1/2" NPT Full Port Valve, (1) 1/2" Plastic Protection Dust Plug, (1) 1/2" Plastic Protection Cap	\$44.14
7021-4142	(1) #30-4142-24" Gas Connector (3/4" MIP x 3/4" FIP) (1) 3/4" NPT Full Port Valve, (1) 3/4" Plastic Protection Dust Plug, (1) 3/4" Plastic Protection Cap	50.84
7031-4142	(1) #40-4142-24" Gas Connector (3/4" MIP x 3/4" FIP) (1) 3/4" NPT Full Port Valve, (1) 3/4" Plastic Protection Dust Plug, (1) 3/4" Plastic Protection Cap	102.99
7041-5152	(1) #50-5152-24" Gas Connector (1" MIP x 1" FIP) (1) 1" NPT Full Port Valve, (1) 1" Plastic Protection Dust Plug, (1) 1" Plastic Protection Cap	132.38





Our listed connectors meet the minimum requirements for manufactured homes as indicated in the appropriate subsections of HUD, CFR 24 section 3280.

Adapters are constructed of brass or zinc-plated carbon steel




Range/Furnace – 30 Series Adapters for 5/8" OD Connectors

Description		Part #	Pack Qty.	Approx. Pack Wt. Lbs.	Price Each Piece
	5/8" OD Flare (15/16" - 16 thread) x 1/2" MIP (Tapped 3/8" FIP)	90-3031	25	5.5	\$3.75
	5/8" OD Flare (15/16" - 16 thread) x 3/4" MIP (Tapped 1/2" FIP)	90-3041	25	6.8	4.91
	5/8" OD Flare (15/16" - 16 thread) x 1/2" FIP	90-3032	25	5.0	3.59
	5/8" OD Flare (15/16" - 16 thread) x 3/4" FIP	90-3042	25	5.3	4.65
	5/8" OD Flare (15/16" - 16 thread) x 3/4" FIP Elbow	95-3042	25	6.8	9.32

Dryer/Water Heater – 20 Series Adapters for 1/2" OD Connectors



Description		Part #	Pack Qty.	Approx. Pack Wt. Lbs.	Price Each Piece
	1/2" OD Flare x 3/8" MIP (Tapped 1/4" FIP)	90-2021	25	4.0	\$3.66
	1/2" OD Flare x 1/2" MIP (Tapped 3/8" FIP)	90-2031	25	5.5	3.27
	1/2" OD Flare x 3/4" MIP (Tapped 1/2" FIP)	90-2041	25	5.5	5.93
	1/2" OD Flare x 3/8" FIP	90-2022	25	3.3	3.12
	1/2" OD Flare x 1/2" FIP	90-2032	25	4.3	3.13
	1/2" OD Flare x 3/4" FIP	90-2042	25	5.5	4.38

Space Heater/Wall Heater – 10 Series Adapters for 3/8" OD Connectors



Description		Part #	Pack Qty.	Approx. Pack Wt. Lbs.	Price Each Piece
	3/8" OD Flare x 3/8" MIP (Tapped 1/4" FIP)	90-1021	25	3.0	\$2.85
	3/8" OD Flare x 1/2" MIP (Tapped 3/8" FIP)	90-1031	25	5.0	4.19
	3/8" OD Flare x 3/8" FIP	90-1022	25	3.0	2.29
	3/8" OD Flare x 1/2" FIP	90-1032	25	4.0	3.91
	3/8" OD Flare x 3/8" MIP Elbow	95-1021	25	4.2	6.07

Adapters and flare caps are constructed of brass or zinc-plated carbon steel



40 Series - Adapters for 1" OD Connectors

Description		Part #	Pack Qty.	Approx. Pack Wt. Lbs.	Price Each Piece
	1" OD Flare x 3/4" MIP (Tapped 1/2" FIP)	90-4041	10	2.8	\$5.76
	1" OD Flare x 3/4" FIP	90-4042	10	3.51	5.11


50 Series - Adapters for 1-1/4" OD Connectors

Description		Part #	Pack Qty.	Approx. Pack Wt. Lbs.	Price Each Piece
	1-1/4" OD Flare x 1" MIP (Tapped 3/4" FIP)	90-5051	10	4.0	\$12.62
	1-1/4" OD Flare x 1" FIP	90-5052	10	3.8	11.56

60 Series - Adapters for 1-1/2" OD Connectors

Description		Part #	Pack Qty.	Approx. Pack Wt. Lbs.	Price Each Piece
	1-1/2" OD Flare x 1-1/4" MIP (Tapped 1" FIP)	90-6061	10	6.0	\$20.59
	1-1/2" OD Flare x 1-1/4" FIP	90-6062	10	5.7	19.68

Flare Caps

Description		For Connector Valve	Part #	Pack Qty.	Approx. Pack Wt. Lbs.	Pack Price
	3/8" SAE Thread (3/8" OD)	91-1032 91-1010, 91ST-1010	2011	10	0.8	\$20.56
	1/2" SAE Thread (1/2" OD) Thread (5/8" OD)	91-2032 91-2020	2012	10	1.3	22.40
	5/8" SAE Thread (5/8" OD)	-----	2013	10	2.0	26.40
	5/8" OD (15/16" - 16 Thread)	91-3032, 91-3042 93-3042	2014	10	2.9	27.33

IMPORTANT: The National Fuel Gas Code (ANSI Z223.1) requires each outlet, including a valve, be closed gas tight with a threaded plug or cap immediately after installation and until equipment is connected, and when equipment is disconnected from an outlet and the outlet is not to be used again immediately.

IMPORTANT: The National Fuel Gas Code (ANSI Z223.1) requires each outlet, including a valve, be closed gas tight with a threaded plug or cap immediately after installation and until equipment is connected, and when equipment is disconnected from an outlet and the outlet is not to be used again immediately.

Straight Valves - FIP x FIP (Reduced Port)



	Part #	Description	Carton Qty.	Approx. Carton Wt. Lbs.	Price Each Piece
	92-2222	3/8" FIP x 3/8" FIP	10	3.0	\$25.00
	92-3232	1/2" FIP x 1/2" FIP	10	3.6	25.00
	92-4242	3/4" FIP x 3/4" FIP	10	5.5	33.00

Straight Valves - FIP x FIP (Side Tapped)



	Part #	Description	Carton Qty.	Approx. Carton Wt. Lbs.	Price Each Piece
	92ST-3232	1/2" FIP x 1/2" FIP	10	4.5	\$35.00
	92ST-4242	3/4" FIP x 3/4" FIP	10	5.7	45.00

Connector Valves - Flare x FIP



	Part #	Description	Carton Qty.	Approx. Carton Wt. Lbs.	Price Each Piece
	91-1032	3/8" OD Flare x 1/2" FIP	10	3.7	\$29.00
	91-2032	1/2" OD Flare x 1/2" FIP	10	4.0	29.00
	91-3032	5/8" OD Flare (15/16" - 16 thread) x 1/2" FIP	10	4.5	32.00
	91-3042	5/8" OD Flare (15/16" - 16 thread) x 3/4" FIP	10	5.8	41.00

Angle Connector Valves - Flare x FIP



	Part #	Description	Carton Qty.	Approx. Carton Wt. Lbs.	Price Each Piece
	93-1032	3/8" OD Flare x 1/2" FIP Angle	10	5.1	\$39.00
	93-2032	1/2" OD Flare x 1/2" FIP Angle	10	5.3	48.00
	93-3042	5/8" OD Flare (15/16" - 16 thread) x 3/4" FIP Angle	10	6.0	75.00

Full Port Valves - FIP x FIP



	Part #	Description	Carton Qty.	Approx. Carton Wt. Lbs.	Price Each Piece
	94-3232	1/2" FIP x 1/2" FIP	10	5.1	\$31.00
	94-4242	3/4" FIP x 3/4" FIP	10	7.5	45.00
	94-5252	1" FIP x 1" FIP	6	7.8	65.00
	94-6262	1-1/4" FIP x 1-1/4" FIP	6	11.6	106.00

Easy to Use Handle

- Handles are ergonomically designed for smooth turns.
- Quarter-turn handle design makes for easy on/off operation.
- Most handles feature a lock-out for added safety.

Easier Installation

- Large wrench flats allow for quick, easy installation.

Reliable Long-Lasting Performance

- The forged brass body eliminates the possibility of leaks associated with cast products.
- All valves are 100% leak tested.
- Valves are approved and design-certified by CSA for use with natural, manufactured, mixed liquefied petroleum gases, and LP gas-air mixtures.

Dormont Manufacturing gas appliance and line pressure regulators are designed for main burner and/or pilot applications, where precise control of tiny flows is an essential operating requirement.

- Housings are high strength aluminum castings.
- All models have been tested for multi-position mounting and may be installed in any plane or angle without restriction.
- They may be used with natural, manufactured, mixed, LP, or LP gas-air mixture.



RV61LNG-52



RV61LLP-52



RV48-CL-32

Natural Gas



Part Number	Pipe Size	Capacity in BTU per hr	Max Inlet Pressure	Outlet Pressure	Price Each
RV47LNG-22	3/8"	125,000	1/2 p.s.i.	2.8" - 5.2" w.c.	\$34.00
R48N32-0306-3.5	1/2"	230,000	1/2 p.s.i.	3.0" - 6.0" w.c.	36.00
R48N42-0306-3.5	3/4"	250,000	1/2 p.s.i.	3.0" - 6.0" w.c.	36.00
RV61LNG-52*	1"	1,100,000	1 p.s.i.	4.0" - 8.0" w.c.	132.00
RV61LNG-62*	1-1/4"	1,100,000	1 p.s.i.	4.0" - 8.0" w.c.	132.00
RV81LNG-72*	1-1/2"	2,500,000	1 p.s.i.	3.0" - 8.0" w.c.	281.00

LP Gas



Part Number	Pipe Size	Capacity in BTU per hr	Max Inlet Pressure	Outlet Pressure	Price Each
RV47LLP-22	3/8"	200,000	1/2 p.s.i.	8.0" - 12.0" w.c.	\$34.00
R48P32-0512-10	1/2"	368,000	1/2 p.s.i.	5.0" - 12.0" w.c.	36.00
R48P42-0512-10	3/4"	400,000	1/2 p.s.i.	5.0" - 12.0" w.c.	36.00
RV61LLP-52*	1"	1,760,000	1 p.s.i.	5.0" - 12.0" w.c.	132.00
RV61LLP-62*	1-1/4"	1,760,000	1 p.s.i.	5.0" - 12.0" w.c.	132.00

Convertible Regulators - preset to deliver outlet pressure for Natural Gas**



Part Number	Pipe Size	Capacity in BTU per hr Nat/LP	Max Inlet Pressure	Outlet Pressure Nat/LP	Price Each
RV47CL-33	3/8"	125,000/200,000	1/2 p.s.i.	4.0" or 10.0" w.c.	\$37.00
RV48CL-32	1/2"	230,000/368,000	1/2 p.s.i.	5.0" or 10.0" w.c.	40.00
RV48CL-42	3/4"	250,000/400,000	1/2 p.s.i.	5.0" or 10.0" w.c.	40.00

**Convertible to LP by inverting cap in stack.

*Regulators marked are for main burner only, NOT for pilot load applications.

Dormont Manufacturing 2 psig regulators are designed for natural and liquefied propane gases.

- CSA design certified.
- Manufactured as gas appliance regulators and as line pressure regulators.
- Both series supply precise regulating control from full-flow, down to tiny pilot flows.
- In the absence of flow, these regulators guarantee excellent control of the outlet pressure.
- Meet standard requirements for use with residential, commercial, and industrial applications.



R325 Regulator



R625 Regulator

Lever Action Regulators - 2 PSIG Systems



Part Number	Gas	Pipe Size	Capacity in BTU per hr	Max Inlet Pressure	Spring Range	Spring Pre-set Point	Master Carton Quantity	Price
R325N32-0509-06	Natural	1/2"	150,000	2 psig	5" to 9"	6	25	\$64.00
R325N32-0711-08	Natural	1/2"	150,000	2 psig	7" to 11"	8	25	64.00
R325P32-0711-11	Propane	1/2"	150,000	2 psig	7" to 11"	11	25	64.00
R625N42-0711-08	Natural	3/4"	300,000	2 psig	7" to 11"	8	18	132.00
R625P42-0711-11	Propane	3/4"	300,000	2 psig	7" to 11"	11	18	132.00

Product Specifications - Models R325 and R625

Gases Natural or Liquefied Propane
 Diaphragm Nitrile Rubber
 Allowable Temperature Range . . -40° to 205° F (-40° to 96° C)
 Housing Aluminum Die Castings
 Vent Limiter Brass
 Maximum Inlet Pressure 2 psig
 Outlet Pressure Adjustment 7" to 11" W.C.

Connection Size NPT (F)

- R325. 1/2" x 1/2"
- R625. 3/4" x 3/4"

Venting

- R325. 1/8" NPT
- R625. 3/8" NPT


Emergency Exposure Limits 65 psig Inlet Side Only

EZ QUICK™

Quickly and easily install refrigerators, ice makers, humidifiers, water filters, and evaporative coolers to an existing water supply with the EZ Quick family of quick-connect water installation products.

Product Specifications:

Temperature Rating: 180°F **Pressure Rating:** 160psi @ 73°F
100psi @ 180°F



**1/2" Water Line Installation Kit
or Individual Tee Valve**
Connects to existing 1/2" water line



**3/4" Water Line Installation Kit
or Individual Tee Valve**
Connects to existing 3/4" water line



NSF



**3/8" Adapter Valve Installation Kit
or Individual Adapter Valve**
Connects to existing 3/8" stop valve



NSF
Certified to NSF Standard 61
Section 9

Part Number	Description	Components	Suggested List
*IMIK-01-25-P5	Water Line Installation Kit: 1/2" CTS x 1/2" CTS EZ Quick Tee Valve with 1/4" OD supply line	- 1/2" Quick-Connect Tee Valve - 1/4" x 25' PEX supply line - 1/4" quick-connect union fitting - 1/4" compression nut and ferrule	\$35.00
*IMIK-02-25-P5	Water Line Installation Kit: 1/2" CTS x 1/2" CTS EZ Quick Tee Valve with 1/4" OD supply line and tube cutter	- 1/2" Quick-Connect Tee Valve - 1/4" x 25' PEX supply line - 1/4" quick-connect union fitting - 1/4" compression nut and ferrule	40.00
*TEE-010-P5	1/2" Quick-Connect Tee Valve	- 1/2" Quick-Connect Tee Valve	12.75
*IMIK-11-25-P5	Water Line Installation Kit: 3/4" CTS x 3/4" CTS EZ Quick Tee Valve with 1/4" OD supply line	- 3/4" Quick-Connect Tee Valve - 1/4" x 25' PEX supply line - 1/4" quick-connect union fitting - 1/4" compression nut and ferrule	39.00
*IMIK-12-25-P5	Water Line Installation Kit: 3/4" CTS x 3/4" CTS EZ Quick Tee Valve with 1/4" OD supply line and tubing cutter	- 3/4" Quick-Connect Tee Valve - 1/4" x 25' PEX supply line - 1/4" quick-connect union fitting - 1/4" compression nut and ferrule - tubing cutter	43.00
*TEE-013-P5	3/4" Quick Connect Tee Valve	- 3/4" Quick Connect Tee Valve	16.00
*IMIK-21-25-P5	Water Line Installation Kit: 3/8" Compression (9/16" - 24 thread) Adapter Valve with 1/4" OD supply line	- 3/8" Compression Adapter Valve - 1/4" x 25' PEX supply line - 1/4" push-to-connect union fitting - 1/4" compression nut and ferrule	37.00
TEE-012-P5	3/8" Compression (9/16" - 24 thread) Adapter Valve	- 3/8" Compression Adapter Valve	14.75

***Lead Free: The wetted surface of this product contacted by consumable water contains less than one quarter of one percent of lead weight (0.25%).**



Everything you need in one complete kit!

Kits Include:

Tankless Service Valves

- Elongated hot valve for ease of access to shut off valve handles
- 1/4-turn purge and drain valves with hose bib connections and tethered brass caps
- Includes integral 3/4" FPT relief valve port in hot water supply valve (150 psi)
- NSF/ANSI 61 certified

Two Flexible Stainless Steel, Braided Water Connectors


ULTRAflow High BTU Gas Connector (gas tankless water heaters)

- Coated with heavy-duty, antimicrobial gray PVC that protects against abuse and environmental factors
- ANSI Z21.24/CSA 6.10 and ANSI Z21.75/CSA 6.27

Gas Tankless Water Heater Connection Kits

All kits come with two 24" braided, stainless steel water connectors

Part Number	Description	List Price
TV75FKIT18	Single Union Service Valve set, 18" ULTRAflow High BTU gas connector (318,500 BTU/hr NAT) (509,600 BTU/hr LP)	\$198.00
TV75FKIT24	Single Union Service Valve set, 24" ULTRAflow High BTU gas connector (290,900 BTU/hr NAT) (465,440 BTU/hr LP)	203.00
TV75FKIT36	Single Union Service Valve set, 36" ULTRAflow High BTU gas connector (255,900 BTU/hr NAT) (409,440 BTU/hr LP)	212.00
TV75KIT18	Double Union Service Valve set, 18" ULTRAflow High BTU gas connector (318,500 BTU/hr NAT) (509,600 BTU/hr LP)	234.00
TV75CKIT18	Double Union Service Valve set with check valve, 18" ULTRAflow High BTU gas connector (318,500 BTU/hr NAT) (509,600 BTU/hr LP)	235.00
TV75KIT24	Double Union Service Valve set, 24" ULTRAflow High BTU gas connector (290,900 BTU/hr NAT) (465,440 BTU/hr LP)	240.00
TV75CKIT24	Double Union Service Valve set with check valve, 24" ULTRAflow High BTU gas connector (290,900 BTU/hr NAT) (465,440 BTU/hr LP)	241.00
TV75KIT36	Double Union Service Valve set, 36" ULTRAflow High BTU gas connector (255,900 BTU/hr NAT) (409,440 BTU/hr LP)	254.00
TV75CKIT36	Double Union Service Valve set with check valve, 36" ULTRAflow High BTU gas connector (255,900 BTU/hr NAT) (409,440 BTU/hr LP)	255.00




Single Union Service Valve Set
Union connections to water heater and 3/4" FPT connections to water supply line

Packaging Specifications: Kit Box dimensions: 18" W x 14-3/4" H x 4-1/2" D • Average weight: 10 lbs.
2-pack Master Carton dimensions: 16" W x 18-1/2" H x 11" D • Average weight: 21.5 lbs.

Electric Tankless Water Heater Connection Kits

Part Number	Description	List Price
ETV75FKIT24	Single Union Service Valve set and (2) 24" Braided Stainless Steel Water Connectors	\$146.00
ETV75KIT24	Double Union Service Valve set and (2) 24" Braided Stainless Steel Water Connectors	163.00
ETV75CKIT24	Double Union Service Valve set with check module and (2) 24" Braided Stainless Steel Water Connectors	164.00

Packaging Specifications: Kit Box dimensions: 18" W x 14-3/4" H x 4-1/2" D • Average weight: 8 lbs.
2-pack Master Carton dimensions: 16" W x 18-1/2" H x 11" D • Average weight: 17.5 lbs.



Double Union Service Valve Set
Union connections to water heater and water supply line

Category Q Lead Free Tankless Water Heater Connection Kits and Valves

California and Vermont have passed new legislation that lowers lead content standards for plumbing, fittings, fixtures, pipes and valves that come in contact with water used for drinking or cooking. The following products meet these standards.

Lead-Free Gas Tankless Water Heater Connection Kits

All kits come with two 24" braided, stainless steel water connectors


Part Number	Description	List Price
LFTV75FKIT18	Single Union Service Valve set, 18" ULTRAflow High BTU gas connector (318,500 BTU/hr NAT) (509,600 BTU/hr LP)	\$291.00
LFTV75FKIT24	Single Union Service Valve set, 24" ULTRAflow High BTU gas connector (290,900 BTU/hr NAT) (465,440 BTU/hr LP)	296.00
LFTV75FKIT36	Single Union Service Valve set, 36" ULTRAflow High BTU gas connector (255,900 BTU/hr NAT) (409,440 BTU/hr LP)	306.00
LFTV75KIT18	Double Union Service Valve set, 18" ULTRAflow High BTU gas connector (318,500 BTU/hr NAT) (509,600 BTU/hr LP)	359.00
LFTV75KIT24	Double Union Service Valve set, 24" ULTRAflow High BTU gas connector (290,900 BTU/hr NAT) (465,440 BTU/hr LP)	364.00
LFTV75KIT36	Double Union Service Valve set, 36" ULTRAflow High BTU gas connector	373.00

Packaging Specifications: Kit Box dimensions: 18" W x 14-3/4" H x 4-1/2" D • Average weight: 10 lbs.
2-pack Master Carton dimensions: 16" W x 18-1/2" H x 11" D • Average weight: 21.5 lbs.


Lead-Free Electric Tankless Water Heater Connection Kits

Part Number	Description	List Price
LFETV75FKIT24	Single Union Service Valve set and (2) 24" Braided Stainless Steel Water Connectors	\$234.00
LFETV75KIT24	Double Union Service Valve set and (2) 24" Braided Stainless	298.00

Packaging Specifications: Kit Box dimensions: 18" W x 14-3/4" H x 4-1/2" D • Average weight: 8 lbs.
2-pack Master Carton dimensions: 16" W x 18-1/2" H x 11" D • Average weight: 17.5 lbs.

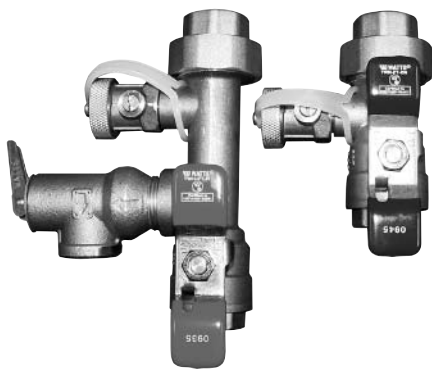

Single Union Service Valve Set
Union connections to water heater and 3/4" FPT
connections to water supply line

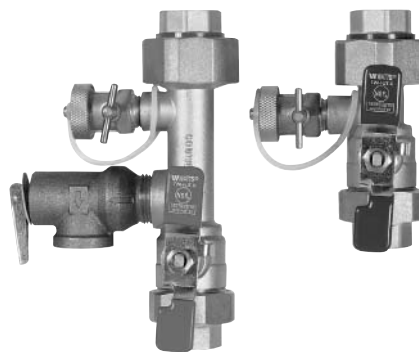

Double Union Service Valve Set
Union connections to water heater and water supply line

Lead-Free: The wetted surface of these products contacted by consumable water contains less than one quarter of one percent (0.25%) of lead weight.



High BTU commercial gas cooking equipment requires specifically designed gas connection systems to ensure that they are supplied with the correct amount of gas to function properly.

Dormont recommends the following components for a maximum **CODE-COMPLIANT** foodservice equipment installation.

The Dormont Blue Hose™

The Dormont commercial-grade, braided, coated, stainless steel gas connector is specifically designed to enable the equipment to be safely moved on a regular basis for cleaning and maintenance as determined by code requirements.

The Restraining Cable

Prevents excess strain on the gas connector when moving the appliance.

The SnapFast™ One-Handed, Quick-Disconnect Coupling

Makes connecting and disconnecting the equipment faster, easier and safer.

Part #	Description	List Price
1650BP36	1/2" Safety System Replacement Hose, 36" Length	\$128.00
1650BPQR36	1/2" Safety System Gas Connector with Restraining Device Kit, 36" Length	211.00
1650BP48	1/2" Safety System Replacement Hose, 48" Length	144.00
1650BPQR48	1/2" Safety System Gas Connector with Restraining Device Kit, 48" Length	227.00
1675BP36	3/4" Safety System Replacement Hose, 36" Length	173.00
1675BPQR36	3/4" Safety System Gas Connector with Restraining Device Kit, 36" Length	276.00
1675BP48	3/4" Safety System Replacement Hose, 48" Length	199.00
1675BPQR48	3/4" Safety System Gas Connector with Restraining Device Kit, 48" Length	308.00
16100BP36	1" Safety System Replacement Hose, 36" Length	194.00
16100BPQR36	1" Safety System Gas Connector with Restraining Device Kit, 36" Length	349.00
16100BP48	1" Safety System Replacement Hose, 48" Length	228.00
16100BPQR48	1" Safety System Gas Connector with Restraining Device Kit, 48" Length	380.00
16125BP36	1-1/4" Safety System Replacement Hose, 36" Length	266.00
16125BPQR36	1-1/4" Safety System Gas Connector with Restraining Device Kit, 36" Length	537.00
16125BP48	1-1/4" Safety System Replacement Hose, 48" Length	322.00
16125BPQR48	1-1/4" Safety System Gas Connector with Restraining Device Kit, 48" Length	594.00

Part #	Description	List Price
A50	1/2" SnapFast™ Quick-Disconnect	\$64.00
A75	3/4" SnapFast Quick-Disconnect	89.00
A100	1" SnapFast Quick-Disconnect	121.00
A125	1-1/4" SnapFast Quick-Disconnect	252.00



This list consists of the most popular and recommended Safety System products. If you require product specifications or information on other Foodservice products, refer to R01-11 Foodservice Products Catalog Supplement on our web site.

For a complete list of products, see the Dormont PowerForce catalog



**INDUSTRY BEST
2 YEAR
WARRANTY!**



These faucet components are tested and certified by WQA against NSF/ANSI 61, Section 9 and ASME A112.18.1

Pre-Rinse Assemblies

Part #	Description	Price
*P-WS8B	Pre-rinse wall mount with wall bracket	\$388.00
P-WS8B-AF12	Pre-rinse wall mount with wall bracket and 12" add-on faucet	485.00
*P-DS4B	Pre-rinse deck mount with wall bracket	388.00
P-DS4B-AF12	Pre-rinse deck mount with wall bracket and 12" add-on faucet	485.00

Wall Mount Faucets

Part #	Description	Price
F-WST8-S08S	Faucet, wall mount, 8" adjustable center with 8" spout	\$177.00
*F-WST8-S12S	Faucet, wall mount, 8" adjustable center with 12" spout	182.00
F-WST8-S14S	Faucet, wall mount, 8" adjustable center with 14" spout	185.00

Service Sink Faucet (Not listed to NSF 61)

Part #	Description	Price
SF-WVB6	Faucet, service sink, 8" center, 6-1/2" spout with vacuum breaker and wall mount	\$283.00

Replacement Parts

Part #	Description	Price
*PRSH-S	Pre-rinse spray head assembly	\$78.00
*PRH-G44	44" Pre-rinse hose assembly with grip	76.00
FRRV-H	Hot valve replacement stem	45.00
FRRV-C	Cold valve replacement stem	45.00

* Lead-free versions are available upon request

Twist Handle Drains

Part #	Description	Price
W-TA-CF	Twist handle drain with 3" opening and 1-1/2" or 2" drain outlet	\$121.00
W-TB-A	Twist handle drain with 3-1/2" opening and 1-1/2" drain outlet	105.00
W-TB-B	Twist handle drain with 3-1/2" opening and 2" drain outlet	105.00



Twist handle

Lever Handle Drains

Part #	Description	Price
W-LA-CF	Lever handle drain with 3" opening and 1-1/2" or 2" drain outlet	\$121.00
W-LB-A	Lever handle drain with 3-1/2" opening and 1-1/2" drain outlet	105.00
W-LB-B	Lever handle drain with 3-1/2" opening and 2" drain outlet	105.00



Lever handle

Terms and Conditions

TERMS:

Net 30 Days. Minimum order \$75 net.
Orders below minimum and broken
cartons are subject to a \$25.00
handling fee.

1. ACCEPTANCE. If this writing differs in any way from the terms and conditions of Immediate Buyer's ("Buyer") order or if this writing is construed as an acceptance or as a confirmation acting as an acceptance, then Dormont's ("Seller") acceptance is EXPRESSLY MADE CONDITIONAL ON BUYER'S ASSENT TO ANY TERMS AND CONDITIONS CONTAINED HEREIN THAT ARE DIFFERENT FROM OR ADDITIONAL TO THOSE CONTAINED IN BUYER'S WRITING. Further, this writing shall be deemed notice of objection to such terms and conditions of Buyer. If this writing is construed as the offer, acceptance hereof is EXPRESSLY LIMITED TO THE TERMS AND CONDITIONS CONTAINED HEREIN. In any event, Buyer's acceptance of the goods shall manifest Buyer's assent to Seller's terms and conditions. No addition to or modification of these items will be effective unless set forth in writing and agreed to by Seller.

2. WARRANTIES AND REMEDIES.

a. Warranty.

Seller warrants to Buyer that it holds and will pass marketable title to the goods sold hereunder. If buyer is not the end user of the goods sold hereunder, Buyer agrees to provide to any immediate buyer ("Remote Purchaser") the Limited Warranty and Disclaimer to End-Use (Remote) Purchasers issued by Seller. This warranty excludes coverage for any product that is moved to a new location. Seller's products should never be reused.

b. Exclusions and Conditions.

Seller's obligations with respect to the express warranties and remedies contained herein are conditioned on the following: (i) Buyer's return of the nonconforming goods, if authorized by Seller (excluding labor and freight); and (ii) be installed by individuals trained and certified as a professional with respect to such installations, and be installed, used, repaired and maintained by Buyer and Remote Purchaser in accordance with Dormont's warnings and instructions, National, State and Local codes or regulations (i.e. National Fuel Code (ANSI Z223.2/NFPA 54); International Fuel Gas Code; Uniform Plumbing Code), standards set by American National Standard Institute, Inc. (ANSI) and/or Canadian Standards Association (CSA) Standards.

3. DISCLAIMER OF IMPLIED WARRANTIES.

SELLER GIVES NO WARRANTIES TO BUYER EXCEPT THOSE EXPRESSLY CONTAINED HEREIN. SELLER DISCLAIMS ALL OTHER WARRANTIES IMPLIED BY LAW, USAGE OF THE TRADE, COURSE OF DEALING OR COURSE OF PERFORMANCE INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

4. LIMITATIONS OF LIABILITY.

The following limitations of Seller's liability are acknowledged by the parties to be fair and reasonable and shall apply to any act or omission hereunder, and to any breach of this contract of which these terms and conditions form a part:

a. Disclaimer of Damages.

IN NO EVENT SHALL SELLER BE LIABLE FOR SPECIAL, INDIRECT, CONSEQUENTIAL OR INCIDENTAL DAMAGES WHETHER ARISING UNDER CONTRACT, WARRANTY, TORT, NEGLIGENCE, STRICT LIABILITY OR ANY OTHER THEORY OF LIABILITY.

Such damages include but are not limited to loss of profits, loss of use of the goods, damage to property, and claims of third parties.

b. Replacement of Fittings.

Buyer acknowledges that if Buyer replaces the adapter fittings supplied by Seller with fittings produced by another manufacturer, then all of Seller's warranties to Buyer and to Remote Purchaser will be voided and Buyer will assume all liability for any damage, injury or loss suffered by Remote Purchaser arising out of this unauthorized modification.

c. Notice and Time of Claims.

(i) Buyer agrees to inspect all products against shipping papers and for damage or shortage upon receipt of goods at destination; (ii) Every claim for loss, damage in transit, or other cause visible upon inspection shall be made with carrier. Claims for shortage must be made within five (5) days of receipt.

5. TERMS. Net 30 Days – minimum order of \$75.

Interest on accounts overdue more than thirty (30) days will be charged at 2% per month or the highest rate permitted by law, whichever is lower. Orders below minimum and broken cartons are subject to a \$25.00 handling fee. Prices subject to change. Buyer shall be liable for any collection costs or attorneys' fees incurred as a result of Buyer's failure to pay its account on time.

6. SHIPPING TERMS.

Prepaid and allowed on \$1250 net and over. Under \$1250 net, shipments shall be F.O.B. factory. Buyer is responsible for all freight charges. The above shall apply only to shipments within the continental United States of America unless otherwise indicated by Seller. The method of shipment and carrier shall be selected by Seller.

7. RETURNS.

No returns are to be made to Seller without first obtaining a return authorization number. The return authorization number must be prominently displayed on the return packaging. Absolutely no returns will be accepted or credited without this prior approval. Returns are subject to 25% restocking charge plus any transportation charges incurred by Seller. Credits will be given only for items that are determined to be eligible for resale by Dormont Manufacturing.

8. TAXES.

The Buyer will pay, or reimburse Seller if it pays, any and all taxes or tariffs or any other similar charges imposed upon this contract, the goods covered hereby or the delivery or use or resale thereof.

9. APPLICABLE LAW.

All questions arising hereunder shall be interpreted and resolved in accordance with the Commercial Code of the Commonwealth of Pennsylvania without regard to its conflict of law provisions and excluding the United Nations Convention on the International Sale of Goods.

10. INDEMNIFICATION

Buyer agrees to indemnify, hold harmless, and defend Seller from and against all claims and lawsuits, including attorney's fees, to the extent that Buyer's negligent acts or omissions to act cause injury, damage or loss to customers of Seller's products.

REST & C, Rev. 3, 6/06



1-800-DORMONT
www.dormont.com

Dormont Manufacturing Limited Warranty and Disclaimers to End-Use (Remote) Purchasers

Dormont Manufacturing warrants that the product and components manufactured by Dormont will be free from defects in material and workmanship. For all connectors, except commercial gas connectors, this limited warranty will be for two (2) years from the original date of purchase. For commercial gas connectors, the limited warranty is for the lifetime of the appliance to which it is first connected. For Tankless Water Heater Service Valves and Water Supply Line Installation Kits, this limited warranty will be for one (1) year from the original date of purchase. PowerForce products are covered by a separate two (2) year warranty. See the Power Force catalog for more complete details.

This limited warranty only applies to a product in its original installation. There is no warranty for a product (1) that has been reused, (2) that is attached to an appliance that has been moved to a different location or (3) where original fittings supplied by Dormont have been changed or removed. Connectors and fittings are not to be reused under any circumstances.

Dormont will replace, FREE OF CHARGE, during the applicable warranty period, its warranted product that it deems to be defective under normal installation, use and service.

Dormont provides no warranty for components incorporated into its products that it does not manufacture and no warranty for products it does not manufacture. The only warranty extended for such products and components is that of the original manufacturer. Contact Dormont for more details on these other warranties.

Replacement can be obtained by returning the product to the original place of purchase, along with the original receipt or proof of purchase. This remedy is exclusive and limited to product replacement only. Labor charges incurred in removal, installation, repair or replacement are excluded.

Any damage to this product as a result of misuse, abuse, neglect, accident, improper installation, or any maintenance or use in violation of Dormont's instructions will void this limited warranty. In addition, Dormont disclaims responsibility for any damage, injury or loss caused by failures due to improper installation, use or maintenance. Product must be installed, used, repaired and maintained in accordance with Dormont's warnings and instructions, all National, State and Local codes and regulations, and standards set by the American National Standards Institute (ANSI).

OTHER THAN THE ABOVE LIMITED WARRANTY, DORMONT MAKES NO ADDITIONAL WARRANTY OF ANY KIND, AND SPECIFICALLY DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY (INCLUDING WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE). IN THE ALTERNATIVE, DORMONT LIMITS ANY IMPLIED WARRANTY TO THE LENGTH OF THE LIMITED WARRANTY PROVIDED FOR THE PARTICULAR PRODUCT.

Under no circumstances shall Dormont be liable for special, indirect, incidental or consequential damages resulting from use of this product whether the claim is based on breach of warranty or contract, negligence, or strict liability in tort even if Dormont could foresee or has been advised of the possibility of such damages.

This warranty gives you specific legal rights, and you may also have other rights that vary from state to state. Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

Warranty, Rev. 3, 4/07

Certifications

This is a representative list of certifications carried by Dormont Manufacturing. Not all products carry all certifications. Product certifications are listed on the applicable product page. Contact Dormont Manufacturing at 1-800-DORMONT for additional information.



USA

Canadian Standards Association



ANSI Z21.24 Connectors For Gas Appliances
ANSI Z21.69 Connectors For Movable Gas Appliances
ANSI Z21.15 Manually Operated Gas Valve For Appliances, Appliance Connector Valves And Hose End Valves
ANSI Z21.41 Quick Disconnect Devices For Use With Gas Fuel
ANSI Z21.18 Gas Appliance Pressure Regulators
ANSI Z21.75 Connectors For Outdoor Appliances and Manufactured Homes
ANSI B16.44 Valves (Gas) – 3371-92 Manually Operated For Use in House Piping Systems

ANSI Z21.90 Gas Convenience Outlets And Optional Enclosures

Additional Certifications

NSF/ANSI 61 Drinking Water System Components
Annex G, NSF/ANSI 61 Weighted Average Lead Content Evaluation

NSF/ANSI 169 Special Purpose Food Equipment and Devices
City of New York MEA #379-92-M and #376-92-M

IAPMO  TS9 Gas Supply Connectors for Manufactured Homes

Approved by the Commonwealth of Massachusetts
 Board of State Examiners of Plumbers and Gas Fitters.
 Commonwealth of Massachusetts code requirements:
 • Connector length may not exceed 36"
 • Lever handle valves are not permitted

Meets the Requirements of:

ANSI Z223.1/NFPA54 National Fuel Gas Code®

ICC / AGA International Fuel Gas Code®

Uniform Plumbing Code

UL567 Pipe Connectors for Flammable and Combustible Liquids and LP-Gas. For use with natural gas and propane



Canada

Canadian Standards Association



CGA 6.10 Connectors For Gas Appliances
CSA 6.16 Connectors For Movable Gas Appliances
CAN / CGA 6.9 Quick Disconnect Devices For Use With Gas Fuel
CAN / CGA 6.3 Gas Appliance Pressure Regulators
CSA 6.27 Connectors For Outdoor Appliances and Manufactured Homes

Meets the requirements of:

CSA B149.1 Natural Gas and Propane Installation Code



United Kingdom (UK)

British Standards Institute 

Certified to BS669-2:1997 License #KM39643
 Tested by BSI, meets the essential safety and performance requirements of BS669 Part 1 and Part 2

CORGI

Technical Bulletin 54




Belgium



Association Royale Des Gaziers Belges

Societe Technique De L'Industrie

Du Gaz En Belgique A.S.B.L Test Report LDG/95/2166-2170 December 1995



Australia / New Zealand

AG 200 Series

AG216, Approval Requirements for limited flexibility connectors for gas.
 Certificate #5531

AG 212

Approval Requirements for Quick Disconnect Devices Certificate #5306

The Australian Gas Association

A.C.N. 004 206 044



Australian Liquefied Petroleum

A.C.N. 002 703 951



AS / NZS 1869:1996

Hose and Hose Assemblies for liquefied petroleum gases (LP Gas), natural gas, and town gas



Denmark



Danish Government Gas Institute

Type-examination certificate #DG-3419, Flexible Metal Hose
 Type-examination certificate #DG-3420, Flexible Metal Hose
 Type-examination certificate #DG-3421, Quick Disconnect Coupling
 Type-examination certificate #DG-3422, Ball Valve



1-800-DORMONT
www.dormont.com

Dormont Showroom POP and Accessories

Vinyl Pegboard Display

Quick and easy to assemble, the Dormont vinyl POP display simply attaches onto existing pegboard or slatwall. The base is 24" x 55" and has a variety of accessories to create a custom display! Call Customer Service for an order form.



Free Standing Display

The D-38 features an attractive but tough powder-coat finish. Product can be displayed on standard peg hooks or with special ganghooks, (see below).



D-38 Display



Gang Hooks

Gang hooks are the ideal way to stock and display bulk gas connectors. Gang hooks can be used on any standard pegboard, slat wall or the Dormont D-38.

Order:

Display-32 (For 10, 20, 30, 40 and 50 series)

Holds: (12) 3/8", (2) 1/2", (16) 5/8". (6) 1" and (5) 1-1/4"

Display-35 (For 20 and 30 series)

Holds: (27) 1/2" and (32) 5/8"

Display-36 (For 30 and 40 and 50 series high BTU)


Holds: (18) 5/8". (16) 1" and (12) 1-1/4"



Counter Mat
Laminated, 11" x 14"
Order: RESCM



Dormont Banner
12" x 36" vinyl banner with grommets
Order: RES Banner



Product Promotional Posters
Laminated, 11" x 14"
Order: CWCPPost and TWHCKPoster



Connect with Confidence

With Dormont, you – and your customers – gain the security of knowing...

- **EVERY** connector is backed by our safe installation of more than 100 million gas connectors over 35 years
- **EVERY** connector is 100% leak tested
- Our products are *specified and preferred* by gas utilities, housing authorities, professional installers, and restaurant chains nationwide
- Dormont makes each gas connector as if it were going to be installed in our own home or business
- Dormont provides competitive pricing without sacrificing quality

With Dormont, you – and your customers – gain the quality assurance of...

- The **only** ISO 9001:2008 registered U.S. manufacturer of gas connectors
- Our state-of-the-art production facility with proprietary equipment in **Pittsburgh, Pennsylvania, USA**
- Expert factory-based technical support for installations
- Exceeding the performance requirements required by CSA and the ANSI product standards
- Consistent, world class service and inventory support with 99% on-time shipment

Dormont®