



UTILITY CARTS

Features:

- Smooth easy to clean surfaces
- NSF listed
- Ship's edge contains spills
- Easy "no tools" assembly. Shipped knocked down.
- Adjustable center shelf on 3-shelf units

Specifications:

- Polyethylene shelves
- Chrome-plated posts
- Quantity (4) 4" diameter resilient rubber swivel stem casters
- Shelf holds 150 lb. (65 kg);
Cart capacity is 400 lb. (180 kg)
- Shelf Color: Charcoal Gray
- Available in 2-shelf and 3-shelf models

Part Number	Description	Depth		Length		Height		Weight	
		(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
J16UC2	2-shelf utility cart	18	455	28	710	33 1/4	845	27 1/2	12.4
J16UC3	3-shelf utility cart	18	455	28	710	33 1/4	845	33	14.9



DUNNAGE RACKS

Specifications:

- One-piece, Polyethylene construction
- NSF listed
- Color: Charcoal Gray
- Weight Capacity: 36" rack – 1200 lb.
48" rack – 2000 lb.
- Slots run front to back for easy loading and unloading

Part Number	Description	Depth		Length		Height		Weight	
		(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
J36PD	36" long plastic dunnage	22	550	36	910	12	305	21	9.5
J48PD	48" long plastic dunnage	22	550	48	1220	12	305	28	12.6

OLY-004E - 3/10



OLYMPIC WIRE SHELVING

- **Unique Design:** The open wire design of these carbon-steel shelves minimizes dust accumulation and allows a free circulation of air, greater visibility of stored items and greater light penetration.
- **Versatile Construction:** Olympic wire shelving can change as quickly as your needs change.
- **Fast, Secure Assembly:** Posts have circular grooves at 1" (25mm) intervals. A tapered split sleeve snaps together around each post. Tapered openings in the shelf corners slide over the tapered split sleeves providing a positive lock. Shelf is assembled in minutes without the use of any special tools.
- **Shelf Wires:** Run front to back, allowing you to slide items on and off shelves smoothly.
- **Shelf Accessibility:** Shelves can be loaded/unloaded easily from all sides. This open construction allows use of maximum storage space of cube.
- **Adjustability:** Shelves can be adjusted at 1" (25mm) intervals along the entire length of the post.
- **Finish:** Chrome finish
- **Posts:** Bolt levelers compensate for surface irregularities on stationary posts. Posts also available for mobile application.

OLYMPIC WIRE SHELVING


WIRE SHELVES

(in.)	Width/Length		Approx. Weight Per Shelf		Pack Quantity	Epoxy
	(in.)	(mm)	(lbs.)	(kg)		
14 x 30	355	760	7	3.2	4	J1430C
14 x 36	355	914	8	3.6	4	J1436C
14 x 42	355	1066	9.5	4.3	4	J1442C
14 x 48	355	1220	10.5	4.7	4	J1448C
14 x 60	355	1524	14	6.3	2	J1460C
14 x 72	355	1829	17	7.7	2	J1472C
18 x 24	457	610	7	3.2	4	J1824C
18 x 30	457	760	8	3.6	4	J1830C
18 x 36	457	914	9.5	4.3	4	J1836C
18 x 42	457	1066	11	5	4	J1842C
18 x 48	457	1220	12	5.4	4	J1848C
18 x 54	457	1370	14.5	6.6	2	J1854C
18 x 60	457	1524	17	7.7	2	J1860C
18 x 72	457	1829	20	9.1	2	J1872C
24 x 24	610	610	9	4.1	4	J2424C
24 x 30	610	760	11	5.0	4	J2430C
24 x 36	610	914	13	5.9	4	J2436C
24 x 42	610	1066	15	6.8	4	J2442C
24 x 48	610	1220	16	7.3	4	J2448C
24 x 54	610	1370	19	8.6	2	J2454C
24 x 60	610	1524	21	9.5	2	J2460C
24 x 72	610	1829	26	11.8	2	J2472C

Load Capacity:

Up to 48" (1220mm) Length = 800 lbs. (363kg)

54" - 72" (1829mm) Length = 600 lbs. (272kg)

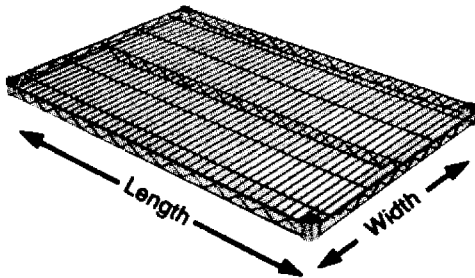


Split Sleeves

POSTS

(in.)	Height * (mm)	Approx. Weight Per Post		Pack Quantity	Cat. No. Epoxy Stationary	Cat. No. Epoxy Mobile
		(lbs.)	(kg)			
34 1/2	875	2	.9	8	J33C	J33UC
62 9/16	1589	3 1/2	1.6	8	J63C	J63UC
74 5/8	1895	4	1.8	8	J74C	J74UC
86 5/8	2200	5	2.3	8	J86C	J86UC

* Height includes leveling bolt and cap.



Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are double-grooved every 8" (203mm) for easy identification.



OLYMPIC WIRE SHELVING

- **Unique Design:** The open wire design of these carbon-steel shelves minimizes dust accumulation and allows a free circulation of air, greater visibility of stored items and greater light penetration.
- **Versatile Construction:** Olympic wire shelving can change as quickly as your needs change.
- **Fast, Secure Assembly:** Posts have circular grooves at 1" (25mm) intervals. A tapered split sleeve snaps together around each post. Tapered openings in the shelf corners slide over the tapered split sleeves providing a positive lock. Shelf is assembled in minutes without the use of any special tools.
- **Shelf Wires:** Run front to back, allowing you to slide items on and off shelves smoothly.
- **Shelf Accessibility:** Shelves can be loaded/unloaded easily from all sides. This open construction allows use of maximum storage space of cube.
- **Adjustability:** Shelves can be adjusted at 1" (25mm) intervals along the entire length of the post.
- **Finish:** Chrome finish
- **Posts:** Bolt levelers compensate for surface irregularities on stationary posts. Posts also available for mobile application.

OLYMPIC WIRE SHELVING


WIRE SHELVES

(in.)	Width/Length		Approx. Weight Per Shelf		Pack Quantity	Epoxy
	(in.)	(mm)	(lbs.)	(kg)		
14 x 30	14	355 x 760	7	3.2	4	J1430C
14 x 36	14	355 x 914	8	3.6	4	J1436C
14 x 42	14	355 x 1066	9.5	4.3	4	J1442C
14 x 48	14	355 x 1220	10.5	4.7	4	J1448C
14 x 60	14	355 x 1524	14	6.3	2	J1460C
14 x 72	14	355 x 1829	17	7.7	2	J1472C
18 x 24	18	457 x 610	7	3.2	4	J1824C
18 x 30	18	457 x 760	8	3.6	4	J1830C
18 x 36	18	457 x 914	9.5	4.3	4	J1836C
18 x 42	18	457 x 1066	11	5	4	J1842C
18 x 48	18	457 x 1220	12	5.4	4	J1848C
18 x 54	18	457 x 1370	14.5	6.6	2	J1854C
18 x 60	18	457 x 1524	17	7.7	2	J1860C
18 x 72	18	457 x 1829	20	9.1	2	J1872C
24 x 24	24	610 x 610	9	4.1	4	J2424C
24 x 30	24	610 x 760	11	5.0	4	J2430C
24 x 36	24	610 x 914	13	5.9	4	J2436C
24 x 42	24	610 x 1066	15	6.8	4	J2442C
24 x 48	24	610 x 1220	16	7.3	4	J2448C
24 x 54	24	610 x 1370	19	8.6	2	J2454C
24 x 60	24	610 x 1524	21	9.5	2	J2460C
24 x 72	24	610 x 1829	26	11.8	2	J2472C

Load Capacity:

Up to 48" (1220mm) Length = 800 lbs. (363kg)

54" - 72" (1829mm) Length = 600 lbs. (272kg)

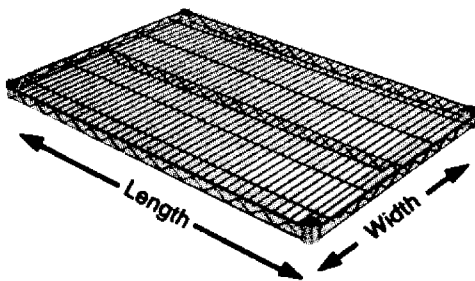


Split Sleeves

POSTS

(in.)	Height * (mm)	Approx. Weight Per Post		Pack Quantity	Cat. No. Epoxy Stationary	Cat. No. Epoxy Mobile
		(lbs.)	(kg)			
34 1/2	875	2	.9	8	J33C	J33UC
62 9/16	1589	3 1/2	1.6	8	J63C	J63UC
74 5/8	1895	4	1.8	8	J74C	J74UC
86 5/8	2200	5	2.3	8	J86C	J86UC

* Height includes leveling bolt and cap.



Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are double-grooved every 8" (203mm) for easy identification.